

How to Restring the AT8441 & AT8449


- Remove the basket from the frame.
- Examine how the old elastic is strung through the basket.
- Remove old elastic and rubber bands.
- Replace both rubber bands.
- Start weaving the elastic at the “8 holes” side. Use the third hole from the left to start. Leave enough elastic to clamp when finished (1 ¼” long). Hold this with your left thumb.



- From the back, thread the elastic through the fourth hole and back through the next hole. Leave enough slack to use for mounting. (hint: pull elastic tight on the inside of the basket.)



- Continue weaving the elastic until you get back to where you started. You should have 4 “loops” to mount the basket to the frame.

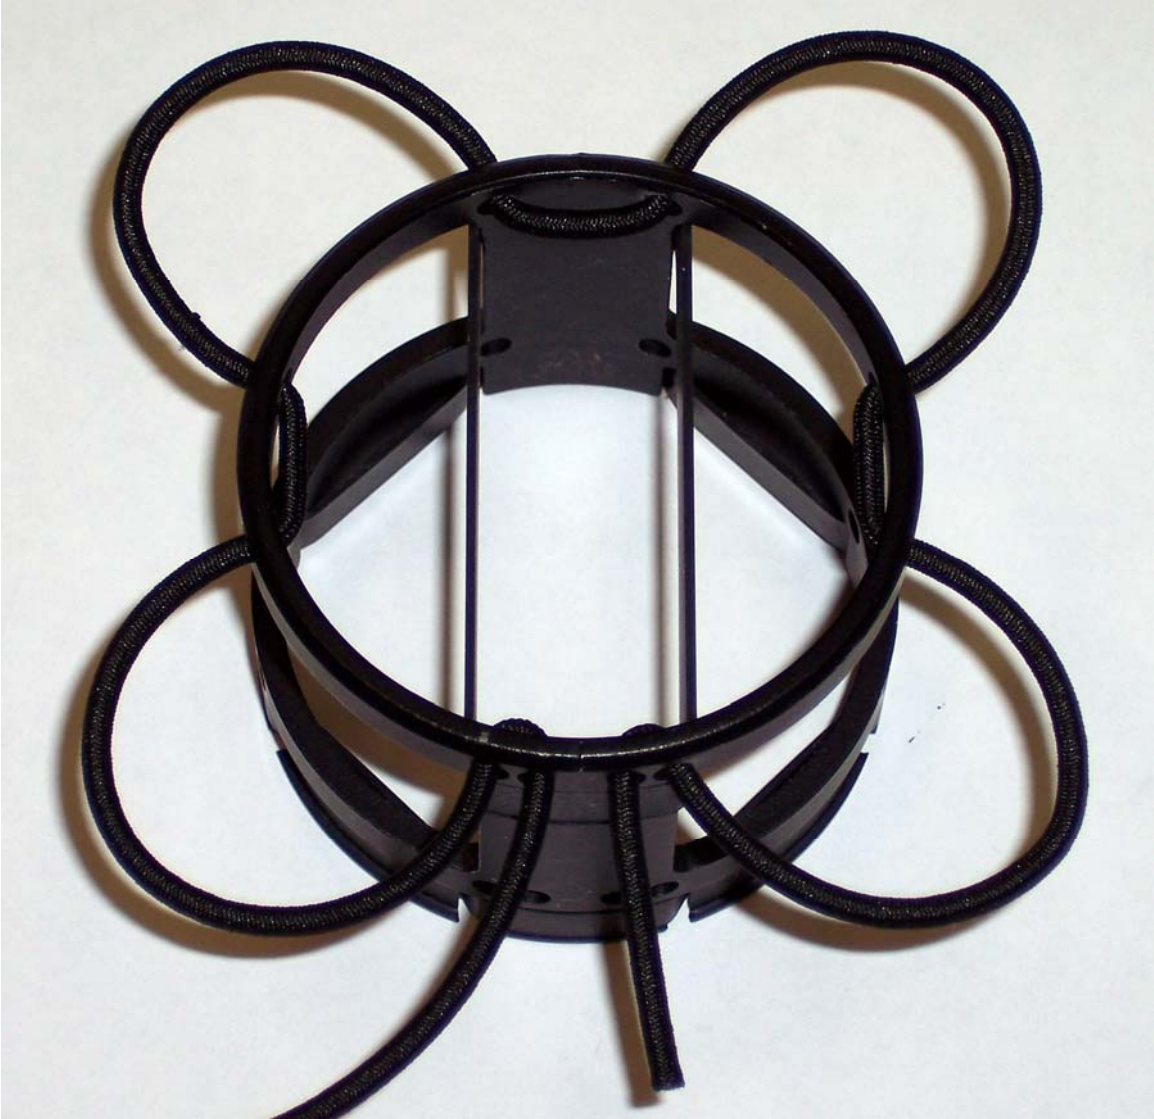

- Thread the elastic through the hole directly below. It should be next to the end of the elastic.
- Turn the basket upside down.



- Continue weaving the elastic just as you did on the other end.
- Once you are done, clamp the 2 loose ends 2 sections of elastic together with needle nose pliers. Trim any extra elastic.



- Completed Basket



- Mount the basket back into the frame using the elastic loops.



- Completed AT8449



- Completed AT8441