

# DATA SHEET

## TESIRAFORTÉ® AI

### FIXED I/O DSP



TesiraFORTÉ® AI is a fixed I/O DSP with 12 analog inputs and 8 analog outputs and includes up to 8 channels of configurable USB audio. USB audio allows TesiraFORTÉ to interface directly with USB audio hosts, as well as to take full advantage of today's most sophisticated conferencing solutions. TesiraFORTÉ AI also provides extensive audio processing, including but not limited to: signal routing and mixing, equalization, filtering, dynamics, and delay, as well as control, monitoring, and diagnostic tools; all configured through the Tesira configuration software. TesiraFORTÉ AI is best-suited for small- to medium-sized rooms that require high-quality audio solutions using voice lift and mix-minus, such as conference rooms or council chambers.

#### FEATURES

- 12 mic/line level inputs, 8 mic/line level outputs
- Gigabit Ethernet port
- Up to 8 channels of configurable USB audio
- RS-232 serial port
- 4-pin GPIO
- 2-line OLED display with capacitive-touch navigation
- Rack mountable (1RU)
- Supports port authentication via IEEE 802.1X
- System configuration and control via Ethernet
- Internal universal power supply
- Signal processing via intuitive software allows configuration and control for signal routing, mixing, equalization, filtering, delay and much more
- CE marked, UL listed, and RoHS compliant
- Covered by Biamp Systems' 5-year warranty

Biamp, Tesira, and TesiraFORTÉ are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. ASIO is a registered trademark of Steinberg Media Technologies GmbH, used with permission. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.



**biamp.**

A: 9300 S.W. Gemini Drive Beaverton, OR 97008 USA

T: +1 503.641.7287

W: [www.biamp.com](http://www.biamp.com)


## ARCHITECTS & ENGINEERS SPECIFICATION

The fixed I/O DSP shall be designed exclusively for use with Tesira® systems. The fixed I/O DSP shall support Ethernet connection for programming and control on a RJ-45 connector. The fixed I/O DSP shall have internal DSP processing. The fixed I/O DSP shall include 4 channels of General Purpose Input and Output connection (GPIO) for sending or receiving logic signals. The programming of the GPIO ports shall be software configurable. The fixed I/O DSP shall include a RS-232 connection for control data transmission into or out of the fixed I/O DSP and such operation shall be software programmable. The fixed I/O DSP shall include a Universal Serial Bus (USB) connection on a standard USB-B type connector. The fixed I/O DSP shall be software configurable to stream up to 8 channels of digital USB Class 1 Audio transmission either into or out of the fixed I/O DSP or simultaneous input and output. The fixed I/O DSP shall support port authentication via IEEE 802.1X. The fixed I/O DSP shall provide 12 balanced input connections for receiving of microphone or line level analog audio signals on screw-down, removable connectors. The fixed I/O DSP shall provide 8 balanced output channels for the transmission of microphone or line level analog audio signals on screw-down, removable connectors. Each individual channel shall have its own dedicated connection. The fixed I/O DSP shall provide front panel OLED identification of device power, status, alarm, and activity as well as system-wide alarm. The fixed I/O DSP shall be rack mountable (1RU) and feature software-configurable signal processing, including but not limited to: signal routing and mixing, equalization, filtering, dynamics, and delay, as well as control, monitoring, and diagnostic tools. The fixed I/O DSP shall be CE marked, UL listed, and shall be compliant with the RoHS directive. Warranty shall be five years. The fixed I/O DSP shall be TesiraFORTÉ® AI.

## TESIRAFORTÉ AI SPECIFICATIONS

<b>Frequency Response:</b>		<b>Crosstalk, channel to channel, 1 kHz:</b>	
20Hz to 20kHz, +4dBu output:	+0.25 dB/-0.5 dB	0dB gain, +4dBu input:	< -85dB
<b>THD+N (22Hz to 22kHz):</b>		54dB gain, -50dBu input:	< -75dB
0dB gain, +4dBu input:	< 0.006%	<b>Sampling Rate:</b>	48kHz
54dB gain, -50dBu input:	< 0.040%	<b>A/D - D/A Converters:</b>	24-bit
<b>EIN</b> (no weighting, 22Hz to 22kHz):	< -125dBu	<b>Power Consumption:</b>	
<b>Dynamic Range</b> (in presence of signal)		100-240VAC 50/60Hz:	< 35W
22Hz to 22kHz, 0dB gain:	> 108dB	<b>USB:</b>	
<b>Input Impedance</b> (balanced):	8kΩ	Bit Depth:	16- or 24-bit
<b>Output Impedance</b> (balanced):	207Ω	Number of Channels:	up to 8
<b>Maximum Input:</b>	+24dBu	Sample Rate:	48kHz
<b>Maximum Output</b> (selectable):	+24dBu, +18dBu, +12dBu, +6dBu, 0dBu, -31dBu	<b>Environment:</b>	
<b>Input Gain Range</b> (6dB steps):	0-66dB	Ambient Operating Temperature Range:	32-104° F (0-40° C)
<b>Overall Dimensions:</b>		Humidity:	0-98%, non-condensing
Height:	1.75 inches (44 mm)	Altitude:	0-6,600 feet (0-2000 Meters) MSL
Width:	19.0 inches (483 mm)	<b>Compliance:</b>	
Depth:	10.5 inches (267 mm)		FCC Part 15B (USA)
Weight:	8 lbs (3.63 kg)		CE marked (Europe)
<b>Phantom Power:</b>	+48VDC (7mA/input)		UL und C-UL listed (USA and Canada)
			RCM (Australia)
			RoHS Directive (Europe)

## TESIRAFORTÉ AI BACK PANEL

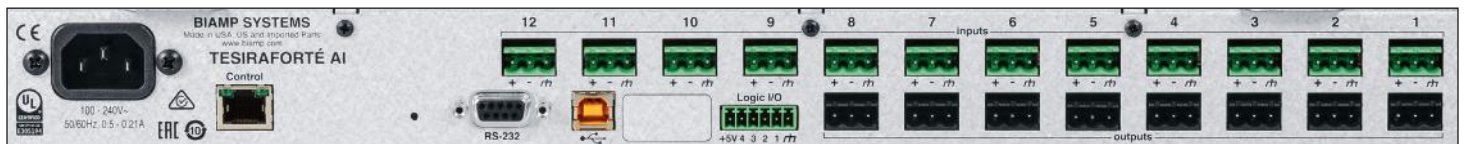

A: 9300 S.W. Gemini Drive Beaverton, OR 97008 USA

T: +1 503.641.7287

W: www.biamp.com

TESDS-307-2010-EN-R1