



CA-16

- 16-Channel controller with 16 buttons and indicators, very easy to use.
- The Wild Tech controller can perfectly work with CA-416 for best control of 16-channel power on/off.
- 16 channels DMX output.
- Power input: DC 9V 300mA Min.
- Weight: 1kgs.
- Dimension: 482 x 63 x 44 mm

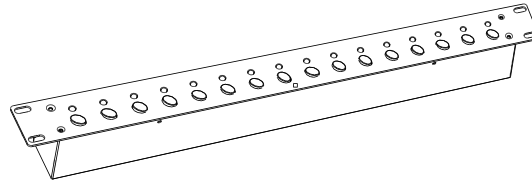

CA-416

- 4 Channels switch pack with DMX input/output.
- Main input: AC 230V with Maximum 15A fuse holder.
- Power switch rated at 16A/250V switch with built-in light indicator.
- Output: T 6.3A per channel/ socket.
- DMX input/output with dip switches to set the DMX address.
- 4 LEDs to monitor the outputs both on front and back panels.
- 1 Power LED on the back panel.
- Power input: AC 9V / 500mA.
- Load: T 6.3A per channel (Max), Total 15A (Max).
- Weight: 2.4 kg
- Dimension: 480 x 100 x 88 mm

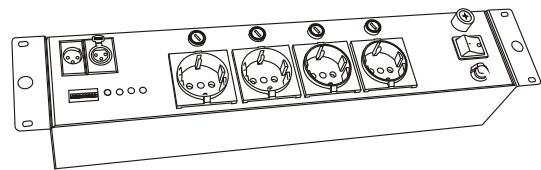

Installation & Connection

1. Please refer to the diagram below - connect CA-16, CA-416 and lights.
2. Set the starting addresses of the 4 x CA-416s at 1,5,9,13 to control 16 fixtures, Please refer to the dipswitch diagram below.
3. Press the 1-16 buttons of CA-16 to control the power on/off of the lights.

CA-16

