

LBC 3081/02



BOSCH

en Installation note

During a fire, the ceiling cavity in which loudspeakers are installed can allow flames to spread throughout a building. To prevent fire entering the cavity via the loudspeaker, the ceiling loudspeaker can be fitted with a steel fire dome (LBC 3081/02). This optional fire dome is clicked into the mounting-ring via three leaf springs, before the loudspeaker is inserted. For extra convenience, a safety cord from the fire dome allows the installer to temporarily hang the loudspeaker unit during installation. This cord also provides reassurance after installation. The fire-dome has knockout holes for two grommets (supplied) and two cable glands (PG 13). This fire dome can only be used with the LBC 3086/41 Ceiling Loudspeaker.




Notice

Product photo includes LBC 3086/41

Certifications and approvals

Region	Certification
Europe	CE Declaration of Conformity

Installation/configuration notes

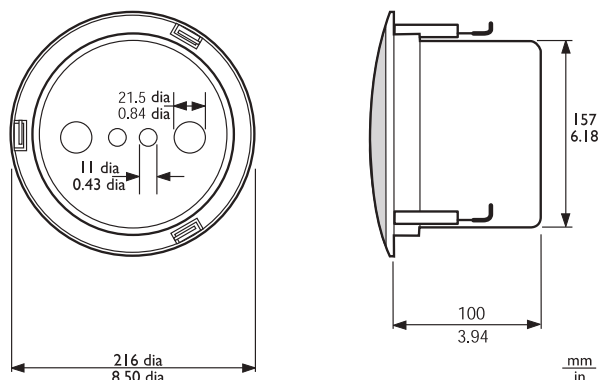

LBC3086/41 + LBC 3081/02 fire dome assembly dimensions in mm (in)

Parts included

Quantity	Components
1	LBC 3081/02 Fire Dome
1	Safety cord
2	Rubber grommets

2 | LBC 3081/02 Fire Dome

Technical specifications

Mechanical

Dimensions (dia. x max. depth)	157 x 70 mm (6.2 x 2.8 in)
Weight	360 g (0.8 lb)
Color	Flame red (RAL 3000)
Certified B15	Acc. to DIN 4102

Ordering information

LBC 3081/02 Fire Dome

metal fire dome for LBC 3086/41 ceiling loudspeaker
Order number **LBC3081/02**

1 Installation

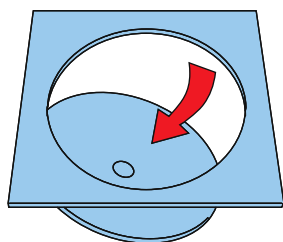


Figure 1.1

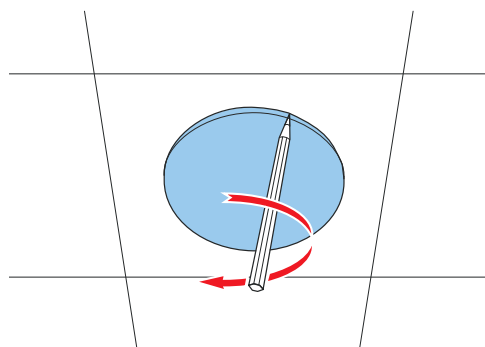


Figure 1.2

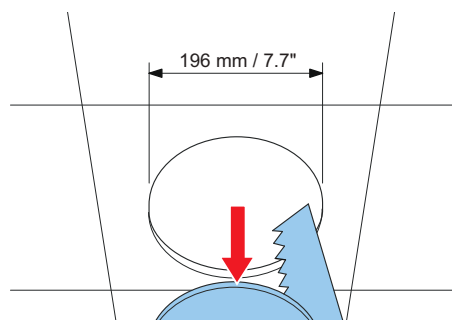


Figure 1.3

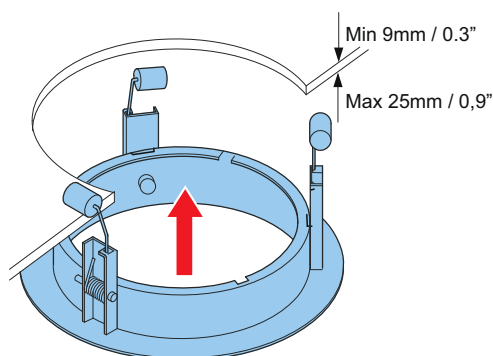


Figure 1.4

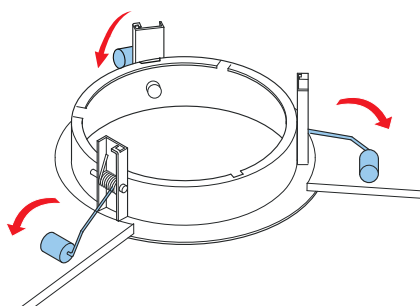


Figure 1.5

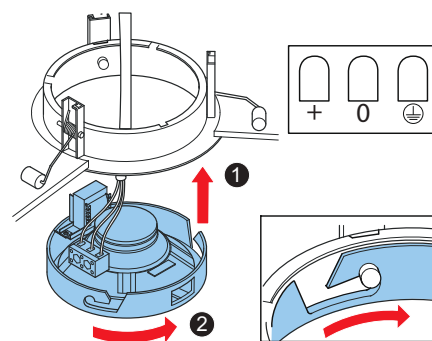


Figure 1.6

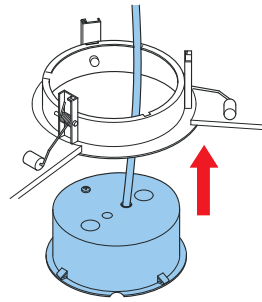


Figure 1.7

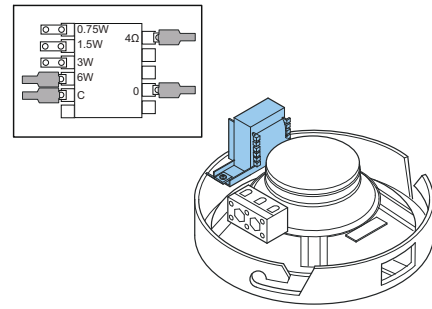


Figure 1.8

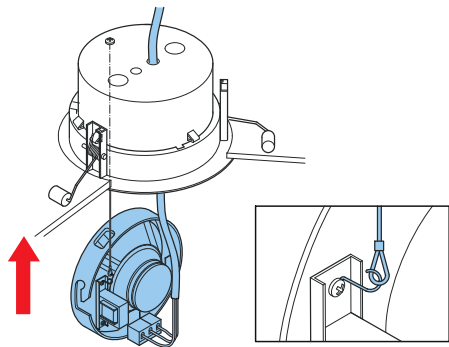


Figure 1.9

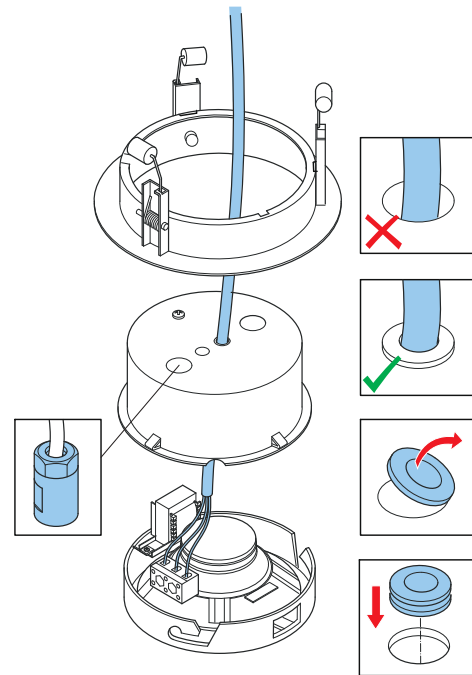


Figure 1.10

Bosch Security Systems B.V.

Torenallee 49

5617 BA Eindhoven

Netherlands

www.boschsecurity.com

© Bosch Security Systems B.V., 2017