


**BOSE**

PROFESSIONAL

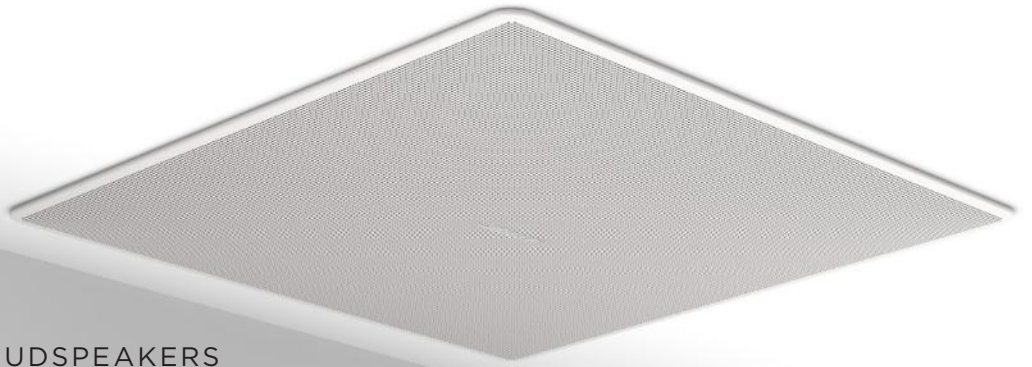

**BOSE EDGEMAX**  
PREMIUM IN-CEILING LOUDSPEAKERS

**In-ceiling sound.  
Reinvented.**



EdgeMax EM90 loudspeaker




EdgeMax EM180 loudspeaker

**Exceptional audio quality, hidden in plain sight.**

Provide improved audio quality and coverage without sacrificing room aesthetics with Bose EdgeMax. Designed with PhaseGuide technology, EdgeMax loudspeakers mount quickly and easily near wall-ceiling boundaries even in the most architecturally challenging rooms.


## PhaseGuide Technology

EdgeMax loudspeakers utilize a two-way system comprised of a compression driver mounted to a proprietary Bose PhaseGuide structure, and an 8-inch driver mounted in a tuned, ported enclosure. Uniquely, EdgeMax loudspeakers have a 75-degree asymmetrical vertical coverage angle and are engineered to be installed in corners and along room perimeters.

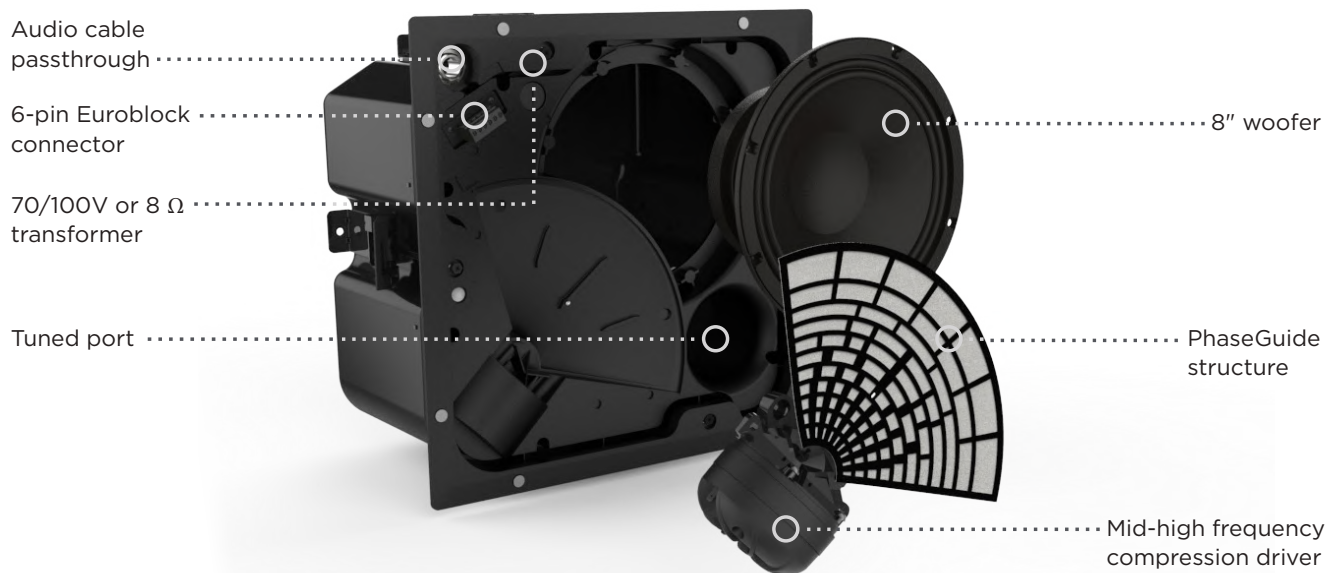

### Time saving, easy install

Autohold spring-loaded mounting arms, magnetic grille attachment, and front baffle connection reduces installation time.

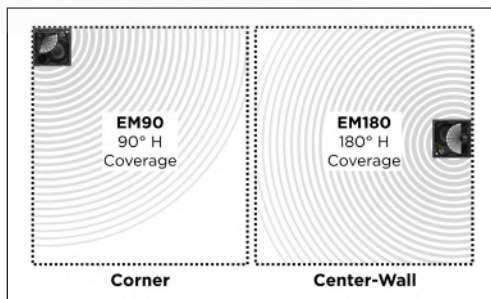

### Undisturbed architectural design

Mount as an in-ceiling speaker at the edge of the room to preserve aesthetics while providing sound quality typical of surface-mounted designs.



### Powerful two-way sound

Features a high-frequency compression driver with an 8-inch passive woofer for >120 dB SPL peak performance. Wall-boundary loading provides extended bass impact.

## Specifications

### Nominal coverage patterns

EM90 90° H x asymmetrical 75° V  
(0° to 75° referenced to wall)

EM180 180° H x asymmetrical 75° V  
(0° to 75° referenced to wall)

### Frequency range

45 - 20,000 Hz

### Power handling AES (long term, peak)

150 W, 600 W

### Safety compliance

UL1480A, UL2043

### Includes

Tile bridge, white grille

### Accessories

Black grille, rough-in pan for new construction, ceiling tile replacement accessory

### Indoor use only

LEARN MORE AT [BOSEEDGEMAX.COM](https://www.bose.com/edgemax)

## TECHNICAL DATA

# EdgeMax™ EM180

## in-ceiling premium loudspeaker with PhaseGuide® technology

**BOSE**

**PROFESSIONAL**

### Product Overview

Bose Professional EdgeMax™ in-ceiling premium loudspeakers feature proprietary Bose PhaseGuide® technology with high-frequency compression drivers to create a new category that combines the room-filling coverage patterns typical of larger surface-mount speakers with the architect-preferred aesthetics of in-ceiling models. Designed to mount near wall-ceiling boundaries, EdgeMax™ loudspeakers provide improved audio quality and coverage, while reducing the number of required units, compared to conventional dome-tweeter ceiling speakers.

### Key Features

- **PhaseGuide technology** – provides a unique asymmetrical vertical pattern for room-filling coverage when mounting near wall-ceiling boundaries
- **Provides improved room visual appearance** – for demanding interior designs by eliminating center-of-ceiling or wall-mounted loudspeakers, and reducing speaker counts
- **Nominal 180° horizontal coverage** – designed for in-ceiling mounting centered along wall coverage zones
- **High-frequency compression driver** – for best-in-class audio quality with superior frequency response and coverage consistency versus typical dome tweeters
- **8-inch woofer** – with wall-boundary loading provides extended bass impact
- **2-way passive crossover with 70/100V transformer**
- **New auto-hold, spring-loaded mounting arms** – for fast, easy installs
- **Magnetically attached grille** – for quick access to wiring and tap settings
- **45 Hz - 20 kHz Frequency Range** – eliminates need for subwoofers
- **Coverage pattern similar to a surface-mount loudspeaker** – enables stereo designs
- **In compliance with the following safety standards: UL1480A, UL2043**



### Technical Specifications

SINGLE MODULE PERFORMANCE		
Frequency Response (-3 dB) <sup>(1)</sup>	50 - 18,000 Hz	
Frequency Range (-10 dB)	45 - 20,000 Hz	
Nominal Coverage Pattern	180° H x asymmetrical 75° V (0° to 75° referenced to wall)	
	Bose extended-lifecycle test <sup>(4)</sup>	AES transducer test <sup>(5)</sup>
Power Handling, long-term continuous	125 W	150 W
Power Handling, peak	500 W	600 W
Sensitivity (SPL/1W @ 1 m) <sup>(2)</sup>	93 dB	93 dB
Calculated Maximum SPL @ 1 m <sup>(3)</sup>	114 dB	115 dB
Calculated Maximum SPL @ 1 m, peak	120 dB	121 dB
Crossover	1.0 kHz (passive 2-way crossover with integrated 70/100V transformer)	
Loudspeaker EQ	Recommended but not required	
Recommended high-pass protection	55 Hz with minimum 12-dB / octave filter	
Overload protection	Resistor-network power reduction with automatic reset	
Transformer taps	70V: 2.5, 5, 10, 20, 40, 80 W, bypass / 100V: 5, 10, 20, 40, 80 W, bypass	
TRANSDUCERS		
Low Frequency	1x 8-inch woofer (1.5-inch voice coil)	
High Frequency	1x compression driver (1.3-inch voice coil)	
Nominal Impedance	8 ohms (transformer bypass)	
PHYSICAL		
Enclosure Material	Engineered-plastics front baffle with integrated steel formed enclosure	
Grille	Micro perforated steel, powder-coated finish, white: RAL 9010, paintable	
Environmental	Indoor only; UL-1480A listed, in compliance with UL2043 for plenum-space installation	
Connectors	Euro block 6-pin connector with loop-through, front-baffle mounted	
Suspension / mounting	Four (4) auto-hold, spring-loaded mounting arms plus four (4) M6 safety cable tabs	
Maximum ceiling thickness	80 mm (3.2")	
Dimensions (H x W x D)	339 x 339 x 249 mm (13.4" L x 13.4" W x 9.8" D) enclosure	
	390 x 390 x 13 mm (15.4" L x 15.4" W x 0.5" D) grille flange, as mounted	
Ceiling cutout and clearance	345 x 345mm (13.6" L x 13.6" W) with 236 mm (9.3") mounting depth	
Net Weight	10.1 kg (22.2 lbs) with grille	
Shipping Weight	12.5 kg (29 lbs)	
Accessories	Adjustable Tile Bridge (Included), Black grille, rough-in pan for new construction	

# TECHNICAL DATA




## EdgeMax™ EM180

in-ceiling premium loudspeaker with PhaseGuide® technology


**BOSE**

PROFESSIONAL



### Nominal Coverage and Room Placement

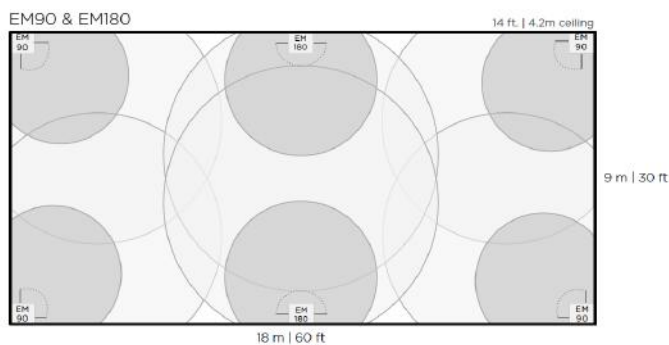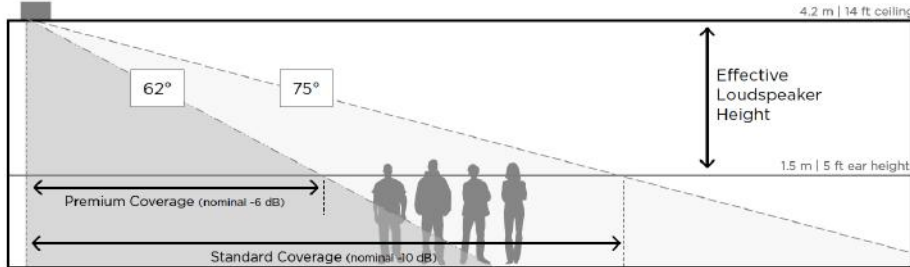


### Dimensions




Top View



Front View  
(Grille Removed)




Front View




Side View

DIMENSIONS APPLY TO BOTH SIDES



Rear View



Bottom View

NOTES:  
1. WEIGHT IS APPROX. 10.1kg [22.2lbs]  
2. DIMENSIONS ARE IN MILLIMETERS OVER INCHES

Footnotes

- (1) Frequency response and range measured on-axis in quarter-space (corner loaded) environment with recommended Active EQ
- (2) Sensitivity measured on-axis in quarter-space (wall loaded) environment with recommended Active EQ
- (3) Maximum SPL calculated from sensitivity and power handling specifications, exclusive of power compression
- (4) Bose extended-lifecycle test using pink noise filtered to meet IEC268-5, 6-dB crest factor, 500-hour duration
- (5) AES standard 2-hour duration with IEC system noise