



Features

More Flexibility

- True Ethernet backbone—fast, reliable and scalable
- Color LCD provides users with diagnostics and presets for easy setup
- Includes SLM (Sweep Load Monitoring) with system-level diagnostics
- Front panel USB connector transfers presets to/from a USB drive to the amp's DSP
- New software interface based on customer feedback manages presets, provides easier system-level changes, and includes a configuration wizard
- The only product available with analog, AES, CobraNet®, HiQnet™ and Ethernet connectivity


No Compromise

- BSS OMNIDRIVEHD™ DSP processing with industry leading IIR filters and linear phase FIR filters
- High common-mode rejection eliminates hum and RFI on input cables
- Professional-grade connectors for all inputs and outputs
- Full power-supply voltage is always available, allowing instantaneous power on demand
- Quality-graded components let you safely drive the amplifier harder
- More total capacitance provides tremendous energy reserves for power bursts


No Comparison

- The only four sound amplifier that provides four routable inputs to any output (analog, AES, VDrive, or CobraNet)
- LevelMAX™ peak voltage and RMS power limiters communicate with each other, resulting in smooth and accurate response, better sound
- Sixth generation patented Class-I (BCA®) circuitry couples power efficiently to the load and provides low AC current draw
- Global Power Supply; universal AC input accepts 100-240VAC, 50/60 Hz (±15%)

I-Tech 4x3500HD DriveCo

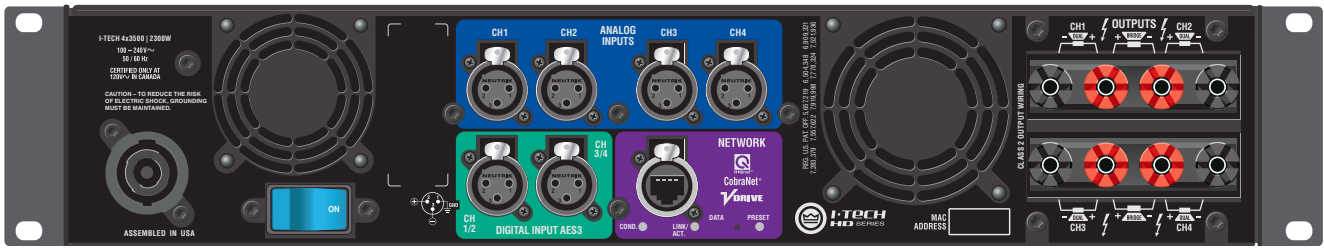

I-Tech 4x3500HD with Binding Posts

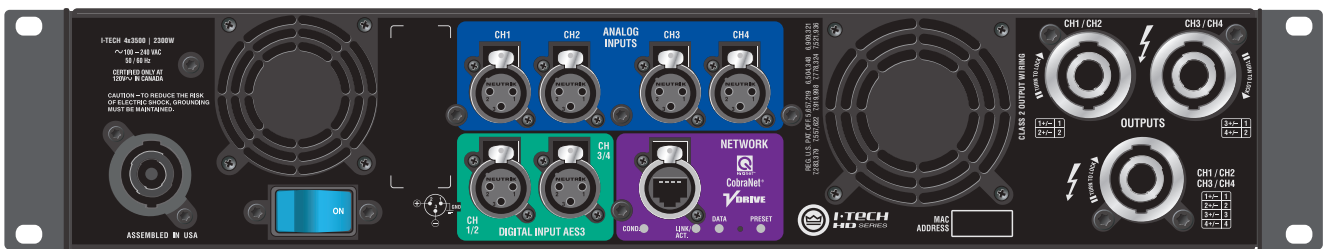

I-Tech 4x3500HD with Speakon Connectors

Power Matrix

Model	Channels	2Ω	2.7Ω	4Ω	8Ω	4Ω Bridged	8Ω Bridged
I-Tech 4x3500HD	4	3500W	3800W	4000W	2100W	6000W	7000W

*1kHz, 20ms burst

Specifications subject to change without prior notice. Latest information available at www.crownaudio.com. Crown offers a three-year, no-fault, fully transferable warranty to meet or exceed original specifications for the first three years of ownership. During this time, if your amplifier fails, or does not perform losses normally covered by insurance and those caused by intentional abuse. Plus, the coverage is transferable, should you sell your amplifier. See your warranty information or call 574-294-8200. © 2015 Crown Audio®, Inc.

Performance Specifications

I-Tech 4x3500HD

Sensitivity	Adjustable in 0.1dB increments from 1.28Vrms to 8Vrms
-------------	---

Damping Factor (10Hz to 100Hz)	>5000
-----------------------------------	-------

Signal to Noise Ratio (below rated power 20Hz to 20kHz, A Weighted)	> -108dB
--	----------

Total Harmonic Distortion (THD) (full rated power, 20Hz to 20kHz)	0.35%
--	-------

Intermodulation Distortion (from 9dB down to -40dB)	0.06%
--	-------

Frequency Response (20Hz to 20kHz at 1W into 4/8Ω)	+/-0.25dB
---	-----------

Crosstalk (below rated power 20Hz to 1kHz)	>80dB
---	-------

Common Mode Rejection (20Hz to 1kHz)	>80dB Typical
---	---------------

Physical Specifications

Width	19 in. (48.3 cm)
-------	------------------

Height	3.3 in. (8.9 cm)
--------	------------------

Depth	16.95 in. (43.1 cm)
-------	---------------------

Net Weight	29 lbs (13.2 kg)
------------	------------------

Shipping Weight	36 lbs (16.3 kg)
-----------------	------------------