

High performance LCD projector captures attention in classrooms or conference rooms with dynamic images and 3,200 ANSI lumens.



Key Features

- ❑ XGA 1024 x 768 resolution
- ❑ 3,200 ANSI lumens white/color output
- ❑ 16 watt audio output
- ❑ 3000:1 contrast ratio
- ❑ HDMI 1 input
- ❑ 5,000 hours hybrid filter*
- ❑ 5,000 hours lamp life (Standard mode) and 6,000 hours lamp life (Eco mode)**
- ❑ Power saving standby mode less than .5W



From the classroom to the conference room, Hitachi's CP-X3015WN LCD projector combines superior image clarity, high quality value, and long-life reliability. Bright, vivid colors with razor-sharp text and bold graphics will truly enhance any lesson or meeting and make it more memorable.

For greater installation convenience, the CP-X3015WN has a cloning function which enables you to copy setting data from one projector to others of the same model via USB memory. Plus, Hitachi's Intelligent Eco Mode with ImageCare combines optimal picture performance with maximum energy savings for a lower total cost of ownership. For added peace of mind, Hitachi's CP-X3015WN is also backed by a generous warranty and our world-class service and support programs.

CP-X3015WN

1800 HITACHI
dps@hitachi.com.au
www.hitachi.com.au/dps



UNIQUE FEATURES

Cloning Function



Copy setting data from one projector to others of the same model via USB memory. Cloning can save almost all PJ settings such as gamma and keystone via USB memory.

ImageCare Technology



ImageCare is a lamp power control function that combines optimal picture performance with maximum energy savings by decreasing energy usage, improving contrast ratio and lengthening lamp life. The result is a lower total cost of ownership and decreased maintenance cost.

Intelligent Eco and Saver Modes



Automatically changes the brightness of the lamp if there is no change in the screen image. Using ImageCare technology, this feature gives optimal picture performance with maximum energy savings and can increase lamp life and lower total cost of ownership.

STANDARD FEATURES

Display via USB



Simply plug and play using the USB port instead of the 15-pin D-sub VGA cable.

Input Source Naming



Users can name input sources in simple language instead of factory default name. **Exclusive to Hitachi.**

Microphone Input



A microphone can be used via the jack located on the input panel. Allows for more dynamic presentations even in standby mode.

Network Control, Maintenance and Security



Embedded networking gives you the ability to manage and control multiple projectors over your LAN. Features include scheduling of events, centralized reporting, image transfer and e-mail alerts for reactive and routine maintenance.

PC-Less Presentation



By using a USB memory stick or other storage device, you can use the projector without a computer. Menus are easy to see with a thumbnail display. Additionally there is also a slideshow function.



PIN Lock / MyScreen / MyText



PIN lock protection can limit projector users. MyScreen PIN lock keeps captured images on the startup screen. Users can set any name logo to MyScreen, clearly identifying ownership. MyText provides the ability to write text on the startup screen such as model name, serial number or location.

PJMessenger



PJMessenger function allows you to send and display text messages and audio alerts on your networked projectors. It is an easy and efficient way to send announcements out to multiple units.

Present Content via LAN



Hitachi's suite of networking software allows you to easily send content directly from your PC to the projector via your LAN connection.

Serial Number and Media Access Control Label



A label is affixed to side of projector to more easily access and read the model name, serial number and MAC address while mounted in ceiling use. This is a convenience for installers, end users and auditors for instant accessibility.

Wireless Presentation Ready



You can use a wireless network by connecting the projector to a computer using the optional USB wireless adapter part number USBWL11N. The adapter supports IEEE802.11b/g and the latest 11n.

CP-X3015WN LCD Projector

HITACHI
Inspire the Next

Long-life reliability with a lower total cost of ownership.

From classrooms to conference rooms, Hitachi's CP-X3015WN can make a big impact on your audience. With 3,200 ANSI lumens brightness and XGA 1024 x 768 resolution, the CP-X3015WN is designed to make any message more memorable with colorful images, crisp text, and powerfully clear audio.



Incorporating Hitachi's leading-edge technology, the CP-X3015WN features high contrast ratio, long lamp life, cloning function enabling you to copy settings data from one projector to others of the same model, and is wireless presentation ready. Plus, embedded networking gives you the ability to manage and control multiple projectors over your LAN (scheduling of events, centralized reporting, image transfer, and e-mail alerts). Even with the the array of advanced features, Hitachi's CP-X3015WN is designed for user-friendly operation and installation convenience.



Front View



Top View




Left Profile




Right Profile



Input/Outputs

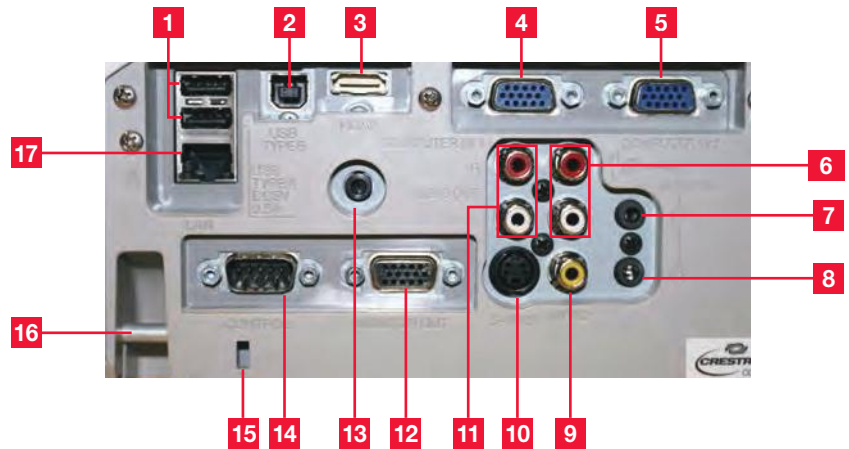

- | | | |
|-------------------|--------------------|-----------------------|
| 1. USB Type A x 2 | 7. Audio in 1 | 13. Microphone Input |
| 2. USB Type B | 8. Audio in 2 | 14. Control (RS-232C) |
| 3. HDMI | 9. Composite Video | 15. Kensington Lock |
| 4. Computer in 1 | 10. S-Video | 16. Security Bar |
| 5. Computer in 2 | 11. Audio Out | 17. LAN |
| 6. Audio In 3 | 12. Monitor Out | |



HDMI HDMI

CP-X3015WN

HI0139-11/12 WEB
All specifications subject to change without notice.
3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.
2013 Hitachi Australia Pty Ltd. All Rights Reserved

Hitachi Australia Pty Ltd
123 Epping Road, Macquarie Park, North Ryde 2113
Toll Free: 1800 HITACHI • Email: dps@hitachi.com.au
Web: www.hitachi.com.au/dps





Accessories and Lenses	
Supplied Accessories	Remote control, power cord, computer cable, network and wireless software, user's manuals, safety manual
Optional Accessories	USBWL11N USB wireless adapter
Optional Lenses	NA
Replacement Parts	
Lamp	DTO1371
Remote Control	HL02881
Filter	MU06481

Projection Throw Chart

Screen Size 4:3	Throw Distance	
	Diagonal	Min
30	0.8m	1.0m
60	1.7m	2.1m
80	2.3m	2.8m
100	2.9m	3.5m
150	4.5m	5.4m
200	6.0m	7.2m
300	9.0m	10.8m

Throw Ratio: 1.5 - 1.8 : 1 (distance : width)
Screen size measured in inches

Specifications		
Display	Projection Technology	3LCD, 3 chip technology
	Resolution	XGA - 1024 x 768
	White Light Output	3,200 ANSI lumens
	Color Light Output	3,200 ANSI lumens
	Colors	16.7 million colors
	Aspect Ratio	Native 4:3 and 16:9 / 16:10 compatible
	Contrast Ratio	3000 : 1 (using active IRIS)
Lens & Operation	Throw Ratio (distance : width)	1.5 - 1.8 : 1
	Lens	F = 1.9 - 2.3 mm, x 1.2 manual zoom
	Lamp Wattage	215W
	Expected Lamp Life*	Approximately 5,000 hours (standard mode) 6,000 hours (Eco mode)
	Expected Filter Life**	Approximately 5,000 hours
	Speaker Output	16W (8W x 2)
	Acoustic Noise Level	36 dB (29 dB in Eco mode)
Compatibility	Keystone	+/- 30° vertical only
	Computer	VGA, XGA, WXGA, WXGA+, SVGA, SXGA+, UXGA (compressed), MAC 16"
	H-Sync	31.5 kHz - 106 kHz
	V-Sync	56 Hz - 120 Hz
	Composite Video	NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM
	Component Video	480i, 480p, 576i, 720p, 1080i, 1080p
	HDMI	480i, 480p, 576i, 720p, 1080i, 1080p, Computer signal TMDS Clock 27 MHz - 150 MHz
Connectors	Digital Input	HDMI x 1 (HDCP compliant)
	Computer Input 1	15-pin mini D-sub x 1
	Computer Input 2	15-pin mini D-sub x 1
	Computer Monitor Output	15-pin mini D-sub x 1
	Video Input	
	S-Video	Mini DIN 4-pin x 1
	Composite Video	RCA jack x 1
	Component Video	15-pin mini D-sub x 2 (shared with computer in 1/2)
	Audio Input	3.5 mm stereo mini jack x 2, RCA jack (L/R) x 1, MIC-in 3.5 mm mini jack x 1
	Audio Output	RCA jack (L/R) x 1
	Network LAN Wired	RJ-45 port (10 base-T / 100 base-TX)
Network LAN Wireless	USB-A, IEEE802.11 b/g/n - optional wireless adapter required	
USB	Type A x 2 (PC-less presentation, wireless adapter, TB-1) Type B x 1 (USB display or mouse control)	
Control Terminals	9-pin D-sub x 1 (RS-232 control)	
Ratings & Warranty	Power Supply	AC100-120V / AC220-240V, 50/60Hz
	Power Consumption	310W
	Operating Temperature	40°F - 95°F (5°C - 35°C)
	Dimensions (W x D x H)	317mm x 98mm x 288mm (excl. protruding parts)
	Weight	approx. 3.6kg
	Approvals	UL 60950-1 / cUL FCC Part 15 subpart B class B
Warranty	3 year limited parts and labor Extended Service Contract available (additional cost)	

* Actual lamp life will vary by individual lamp and based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.
** Actual filter life will vary by individual filter and based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.

CP-X3015WN

