

Technical Manual

JBL2245H

SPECIFICATIONS



ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Capacity: 600W Continuous Program
- Frequency Range: 20 Hz to 2 kHz
- Sensitivity: 95 dB SPL*
- Crossover Frequencies: N/A

SYSTEM COMPONENTS:

- Cabinet: N/A
- Grille: N/A
- Low Frequency Transducer: 460mm (18 in.) Cone Transducer (2245H)
- DC Resistance: 5.1 ohm $\pm 10\%$ Copper Wire

AURAL SWEEP TEST SPECIFICATIONS:

- A. L.F. Aural Sweep Test: 10.0V Input, 20 Hz to 1.2 kHz (G)

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 464mm x 464mm x 184mm D (18.25 x 18.25 x 7.25 in. D)
- Shipping Weight: 32 lbs. (14.5 kg)

WARRANTY INFORMATION:


- Refer to the Warranty Statement packed with each product.

*1 Watt (2.83 V RMS) @ 1 Meter

PACKAGE

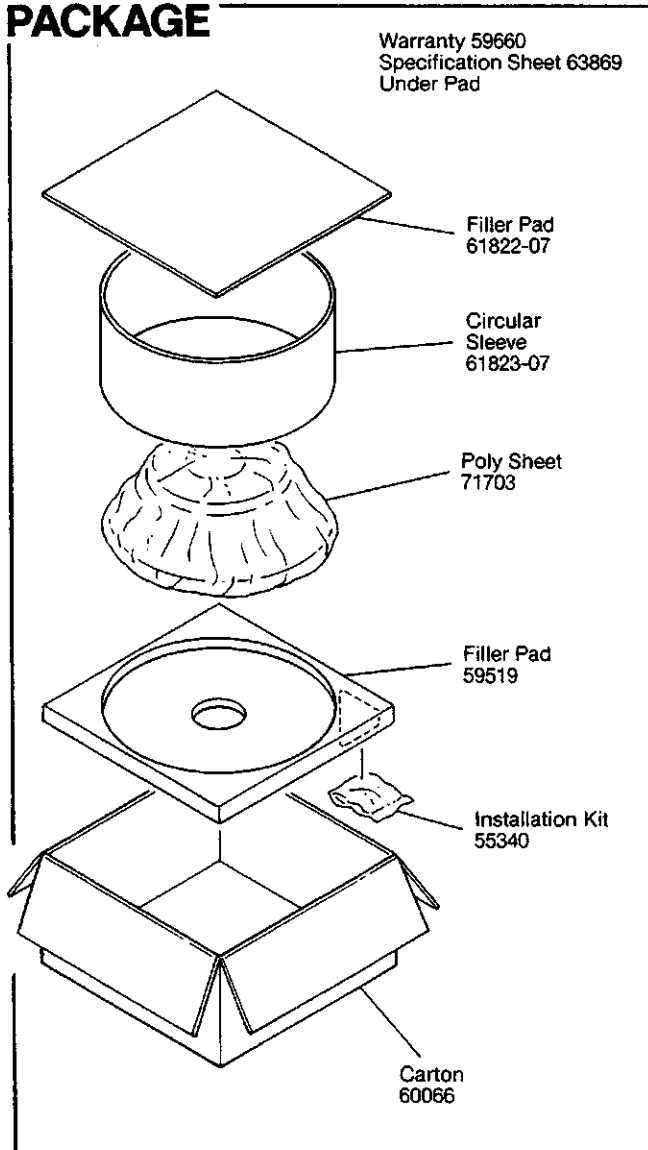

COMPONENT VIEW

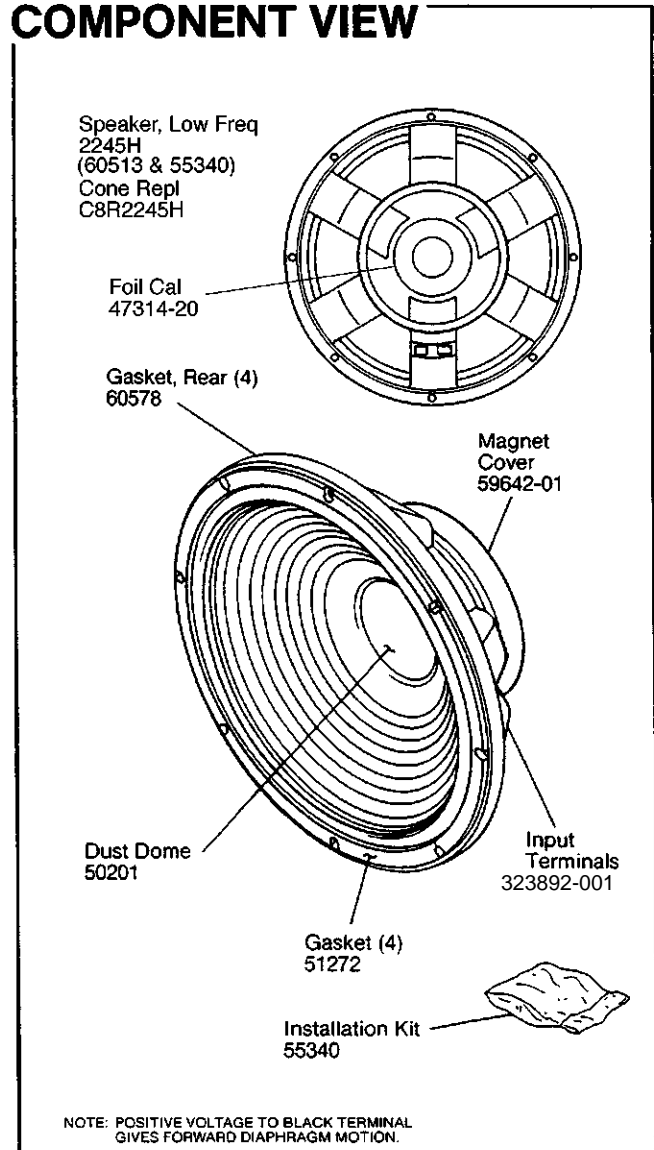


JBL2245H REV E


JBL2245H

MECHANICAL DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS SHALL BE IN INCHES. THIS DRAWING IS NOT TO BE REPRODUCED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPROXIMATIONS WITHOUT WRITTEN PERMISSION.

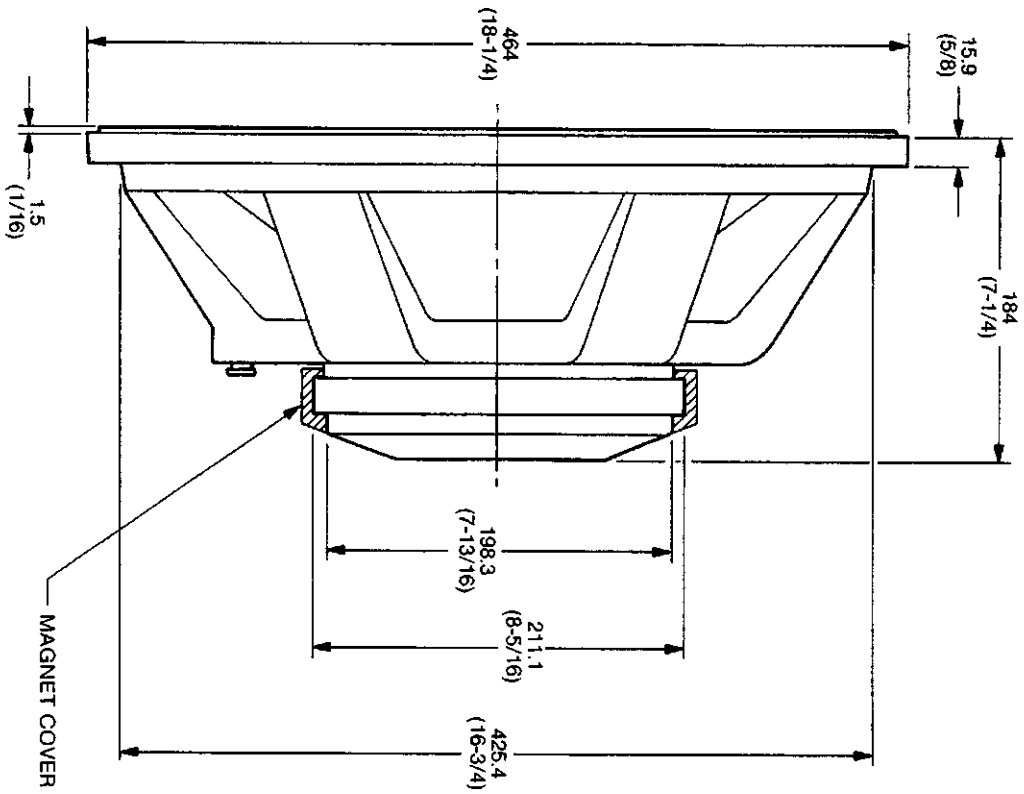

ALL DIMENSIONS ARE REF. ONLY
NOTE: DIMENSIONS IN () ARE IN INCHES

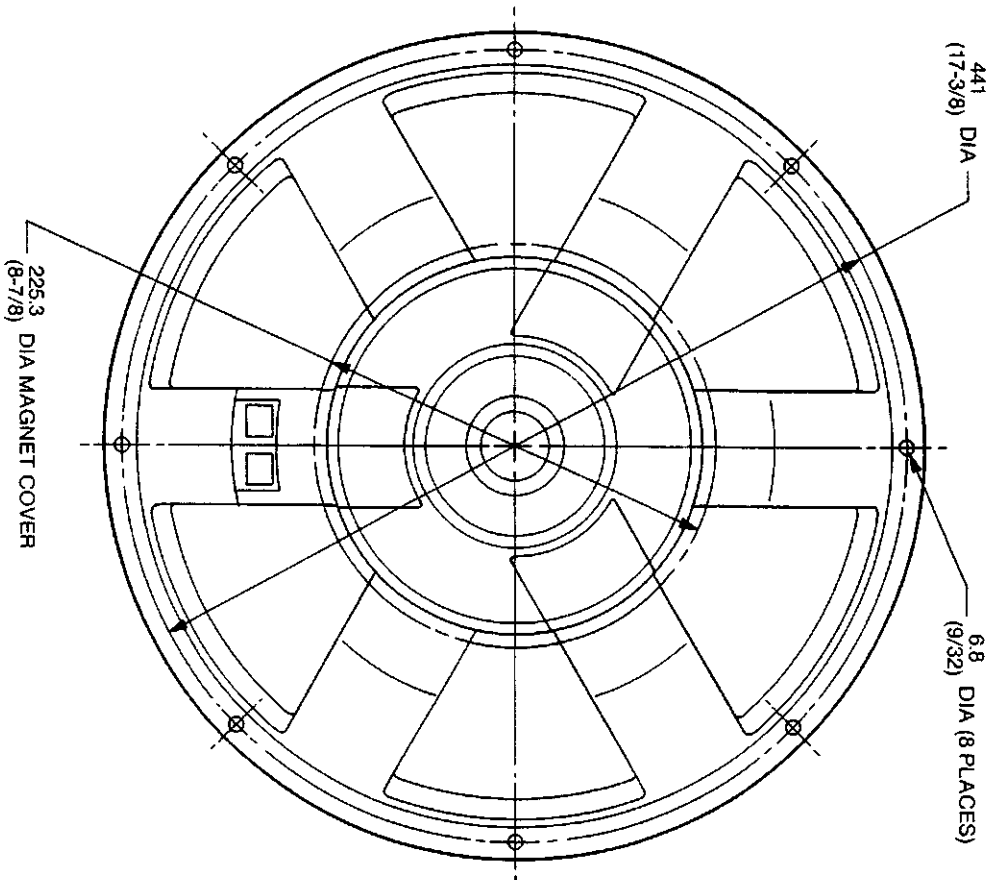

JBL2245H