

Technical Manual

JBL 2258HPL

PROFESSIONAL

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohms
- Power Capacity: 800W
- Frequency Range: 35 Hz – 1 kHz
- Sensitivity: 97 dB SPL, 1 Watt @ 1 Meter

SYSTEM COMPONENTS:

- Low Frequency Transducer: 460mm (18 in.) Cone
- Re: 5.2 ohms
- Fs: 31 Hz
- Qts: 0.27
- Qms: 4.82
- Qes: 0.28
- Vas: 407 Liters
- Ref Eff:
- Sd: 0.124 Sq Meters

SYSTEM COMPONENTS: (Cont'd)

- Mms: 140 Gms
- BL: 22.3 T*M
- Le @ 1kHz: 1.24mH
- Xmax: 8mm
- 10% THD

AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 7.0V Input, 20 Hz to 2 kHz

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 460mm Dia. x 242mm D (18.0 in. Dia. x 9.5 in. D)
- Shipping Weight: 15 lbs. (6.8 kg.)

WARRANTY INFORMATION:

- Refer to Warranty Statement packed with each product.



PACKAGE

Warranty 59660

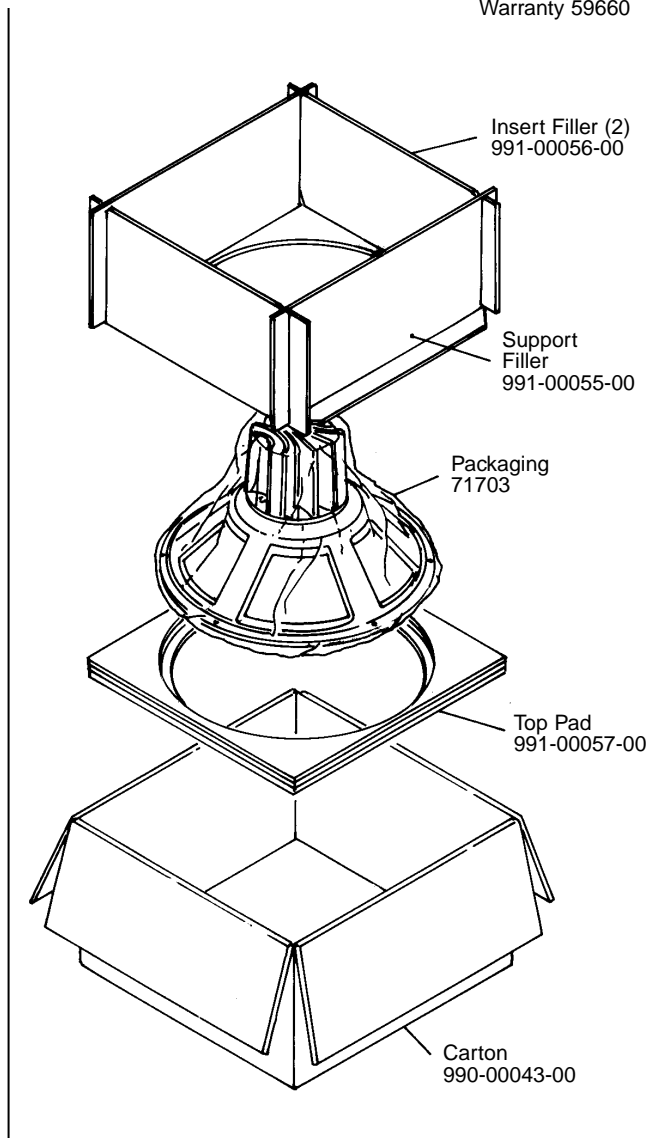

COMPONENT VIEW

Driver, Low Freq
2258HPL
Cone Repl
C8R2258

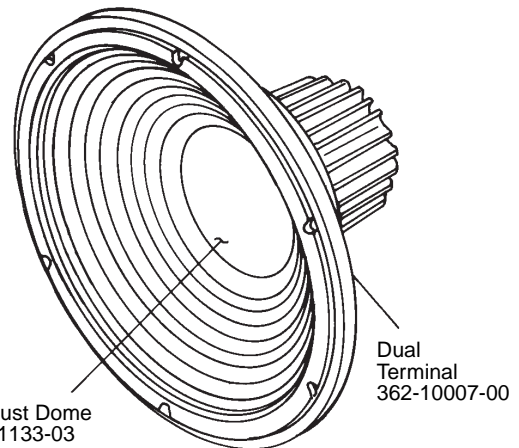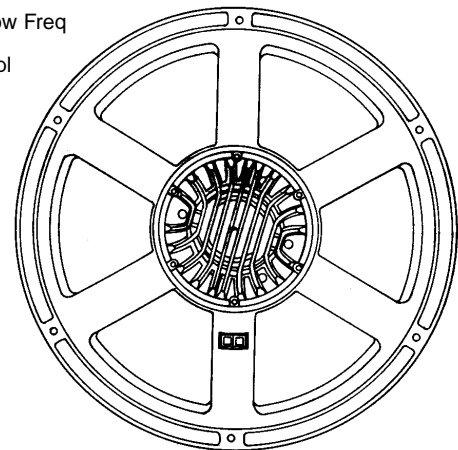

Dust Dome
71133-03

Dual
Terminal
362-10007-00


NOTE: POSITIVE VOLTAGE TO RED TERMINAL
GIVES FORWARD DIAPHRAGM MOTION.

JBL2258HPL REV B

JBL2258HPL

MECHANICAL DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL INCORPORATED. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

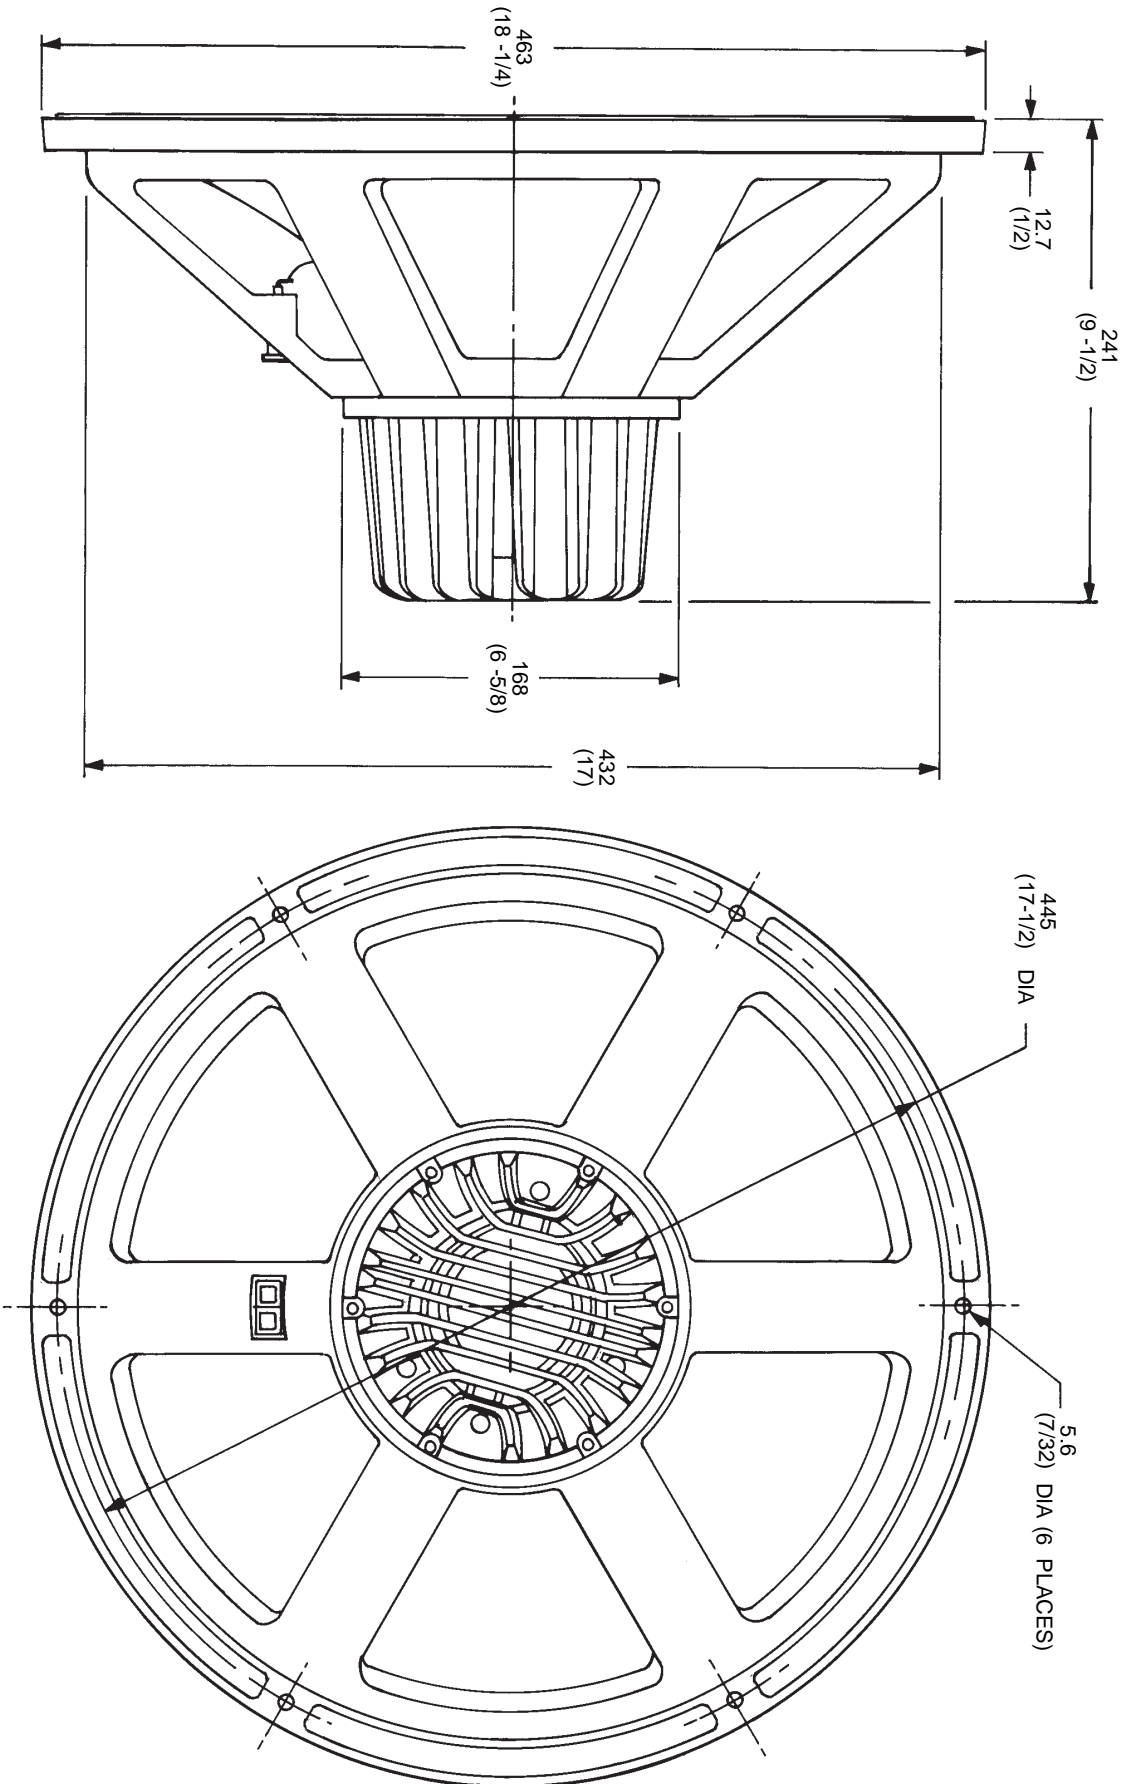

NOTE: ALL DIMENSIONS ARE REF. ONLY
DIMENSIONS IN () ARE IN INCHES

JBL2258HPL