


ASB6118 High Power Single 18" Subwoofer

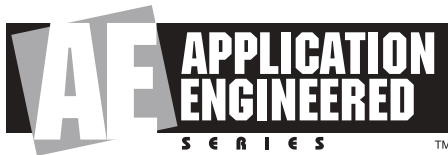

Key Features:

- ▶ 1 x 18" 2242H SVG™ Driver.
- ▶ Large vent area for high output with low distortion.
- ▶ Arrays with various AE Series mid-high frequency 2-way models (see AE Series Array Guide).

Applications:

- ▶ Performing arts facilities
- ▶ Theatrical sound design
- ▶ Auditoriums
- ▶ Houses of worship
- ▶ Live clubs
- ▶ Dance-clubs/discotheques
- ▶ Sports facilities
- ▶ Themed entertainment venues

ASB6118 is a high power subwoofer system comprised of one 460 mm (18 in) SVG Super Vented Gap low frequency driver in a vented, front-loaded configuration for extended bandwidth. The rectangular cabinet is fitted with M10 threaded suspension points. Pre-engineered array bracketry is available.

ASB6118 is part of JBL's AE Application Engineered Series, a versatile family of loudspeakers for a wide variety of applications.



Specifications:

System:	
Frequency Range (-10 dB):	28 Hz – 1 kHz
Frequency Response (±3 dB):	35 Hz – 1 kHz
Transducer Power Rating (AES) ¹ :	1200 W (4800 W peak), 2 hrs
Long-Term System Power Rating ² :	800 W (3200 W peak), 100 hrs
Maximum SPL:	30 Hz – 100 Hz: 129 dB-SPL cont avg (135 dB peak) 100 Hz – 500 Hz: 129 dB-SPL cont avg (135 dB peak)
System Sensitivity (dB-SPL, 1W @ 1m):	30 Hz – 100 Hz: 98 dB 100 Hz – 500 Hz: 98 dB
Nominal Impedance:	8 ohms
Transducers:	
Low Frequency Driver:	1 x JBL 2242H 460 mm (18 in) SVG™ driver with 100 mm (4 in) voice coil
Physical:	
Enclosure:	Rectangular cabinet, 16 mm (5/8 in) exterior grade 11-ply Finnish birch plywood
Suspension Attachment:	12 points (3 top, 3 bottom, 2 each side, 2 rear), M10 threaded hardware
Finish:	Black DuralFlex™ finish. White available upon request.
Grille:	Powder coated 14 gauge perforated steel, with acoustically transparent black foam backing.
Input Connector:	NL4 Neutrik Speakon® and CE-compliant covered barrier strip terminals. Barrier terminals accept up to 5.2 sq mm (10 AWG) wire or max width 9 mm (.375 in) spade lugs. Speakon in parallel with barrier strip for loop-through.
Environmental Specifications:	Mil-Std 810; IP-x3 per IEC529.
Dimensions (H x W x D in vertical cabinet orientation):	548 x 561 x 816 mm (21.6 x 22.1 x 32.2 in)
Net Weight:	44.5 kg (98 lb)
Optional Accessories:	M10 x 35 mm forged shoulder eyebolts with washers. Optional planar array frame kit. See AE Series Bracket Guide

¹AES standard, one decade pink noise with 6 dB crest factor within device's operational band, free air. Standard AES 2 hr rating plus long-term 100 hr rating are specified for low-frequency transducers.

²AES standard, one decade pink noise with 6 dB crest factor, in cabinet, long-term 100 hr rating.


³Calculated based on power rating and sensitivity, exclusive of power compression.

⁴Half-space (2 π) loading, averaged in specified frequency band.



JBL continually engages in research related to product improvement. Changes introduced into existing products without notice are an expression of that philosophy.

▶ ASB6118 High Power Single 18" Subwoofer

Frequency response is measured on-axis at a distance referenced to 1 m @ 1 watt (2.83 Vrms) input, shown as half-space (2π , solid line) and full-space (4π , dotted line) environment.

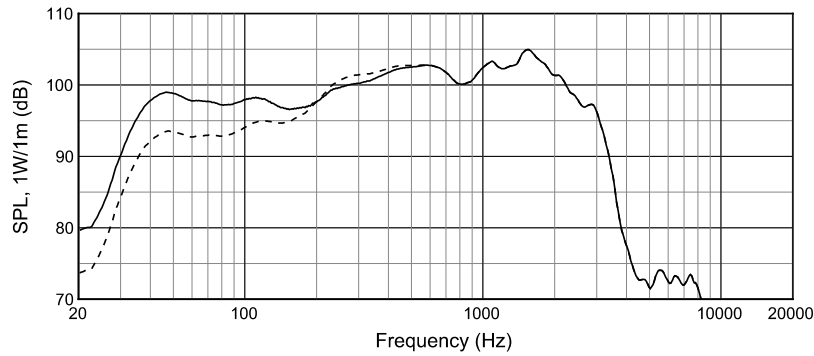


Electrical Input Impedance

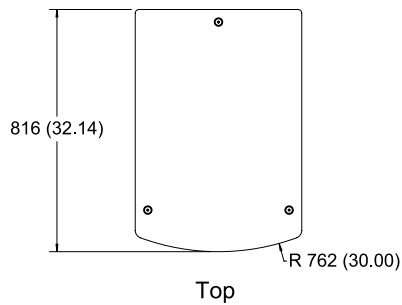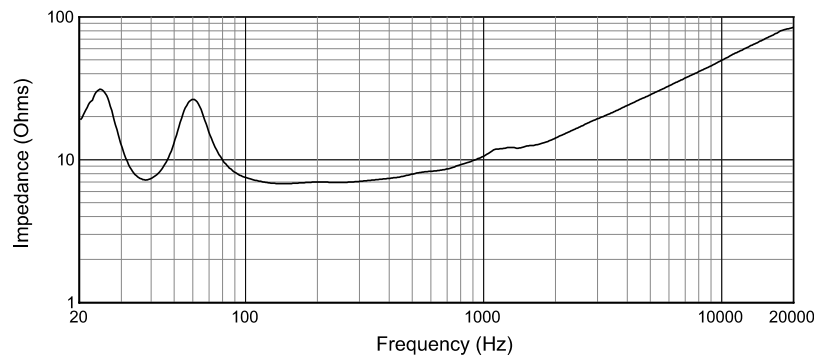


Dimensions in mm (in).

For more detailed dimensional information, refer to Application Data Sheet.


For AE & AE Compact Series WRC and WRX versions please visit the JBL Pro website at <http://www.jblpro.com/www/products/installed-sound/ae-series#.V63kVfkrLIV> to download Drawings.



Front



Side



Back



JBL Professional
8500 Balboa Boulevard, P.O. Box 2200
Northridge, California 91329 U.S.A.

© A Harman International Company
© Copyright 2016 JBL Professional

SS ASB6118
CRP 10M
8/16