



MP255S Dual 15 Inch Subwoofer



Professional Series

Key Features:

- ▶ Dual fifteen inch band-pass design puts the energy in the bass region where it's needed for "punch" and power
- ▶ A low-pass filter is provided to block mid-range output from the subwoofer. Along with the band-pass design, this feature assures that the MP255S will combine with the mid / high speaker for excellent low-frequency performance - even without a separate subwoofer amplifier. Even greater performance and control is possible in bi-amplified configurations.
- ▶ Dual Neutrik® Speakon® NL-4 input connectors provided for secure connection and loop-through capability.
- ▶ Input connections may be reconfigured for pin 1± or pin 2± for compatibility with any cabling scheme.
- ▶ Enclosure constructed of 7-ply, 18mm plywood using tongue-and-groove joint detail for durability and years of service.
- ▶ Covered in premium grade, 12 oz. carpet - the most durable and attractive carpet covering available.
- ▶ 18 gauge, hexagon perforated, steel grill.
- ▶ Heavy duty casters mounted on the rear of the enclosure for easy transport.
- ▶ 35mm pole mount receptacle. 24 inch (610 mm) steel pole included.

The MPro MP255S is a dual fifteen inch sub-woofer in a dual-tuned band-pass enclosure designed to supplement and extend the low-frequency output of full-range systems in a variety of portable and fixed applications. The band-pass design combined with an internal Low Pass Filter (LPF) assures solid performance in bi-amplified or single amplified systems.. While configured for vertical orientation, the speaker may also be used in a horizontal position when a larger footprint and lower vertical height are preferred.



With MP215 and Included Pole



Preliminary Specifications:


System Type:	Dual 15", band-pass subwoofer
Frequency Range (-10 dB):	34 Hz - 200 Hz
Frequency Response (±3 dB):	40 Hz - 180 Hz
Sensitivity (1w/1m):	98 dB SPL
Nominal Impedance:	4 ohms
Rated Maximum SPL:	131 dB peak, @ 1 m (3.3 ft)
Power Capacity:	500 watts (IEC filtered noise, 100 hours)
Peak Power Capacity:	2,000 watts
Low Pass Filter:	300 Hz, 6 dB / octave
Dimensions (H x W x D):	950.2mm x 527.1mm x 940.2mm (37.4 in x 20.75 in x 37.0 in)
Net Weight:	52.2 kg (115 lbs.)
Drivers:	Two JBL M115-8A
Input Connectors:	Neutrik® Speakon® NL-4 (x2); factory wired for pins 1± operation, user configurable for 2± operation
Enclosure Construction:	Dark gray carpet covered, 7 ply, 18mm plywood using tongue and groove joint detail
Transportability:	Two swivel and two fixed 3 inch casters; four steel handles.
Included Accessories:	24 inch (610mm), 35mm (diameter) steel pole

1. "Power Capacity" and "Peak Power Capacity" ratings are based on the average and peak power handling capacity of product samples subjected to a 100 hour power test of the system design using IEC filtered random noise with a crest factor of 6 dB.


JBL continually engages in research related to product improvement. New materials, production methods and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current JBL product may differ in some respects from its published description, but will always equal or exceed the original design specifications unless otherwise stated.

► **MPro MP255S Dual 15 Inch Subwoofer**


Frequency Response:

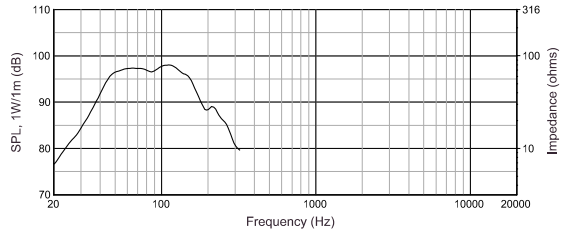

Block Diagram:

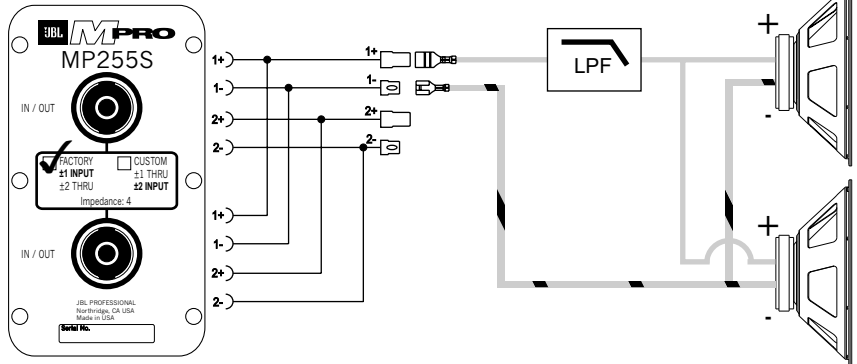

Dimensions:

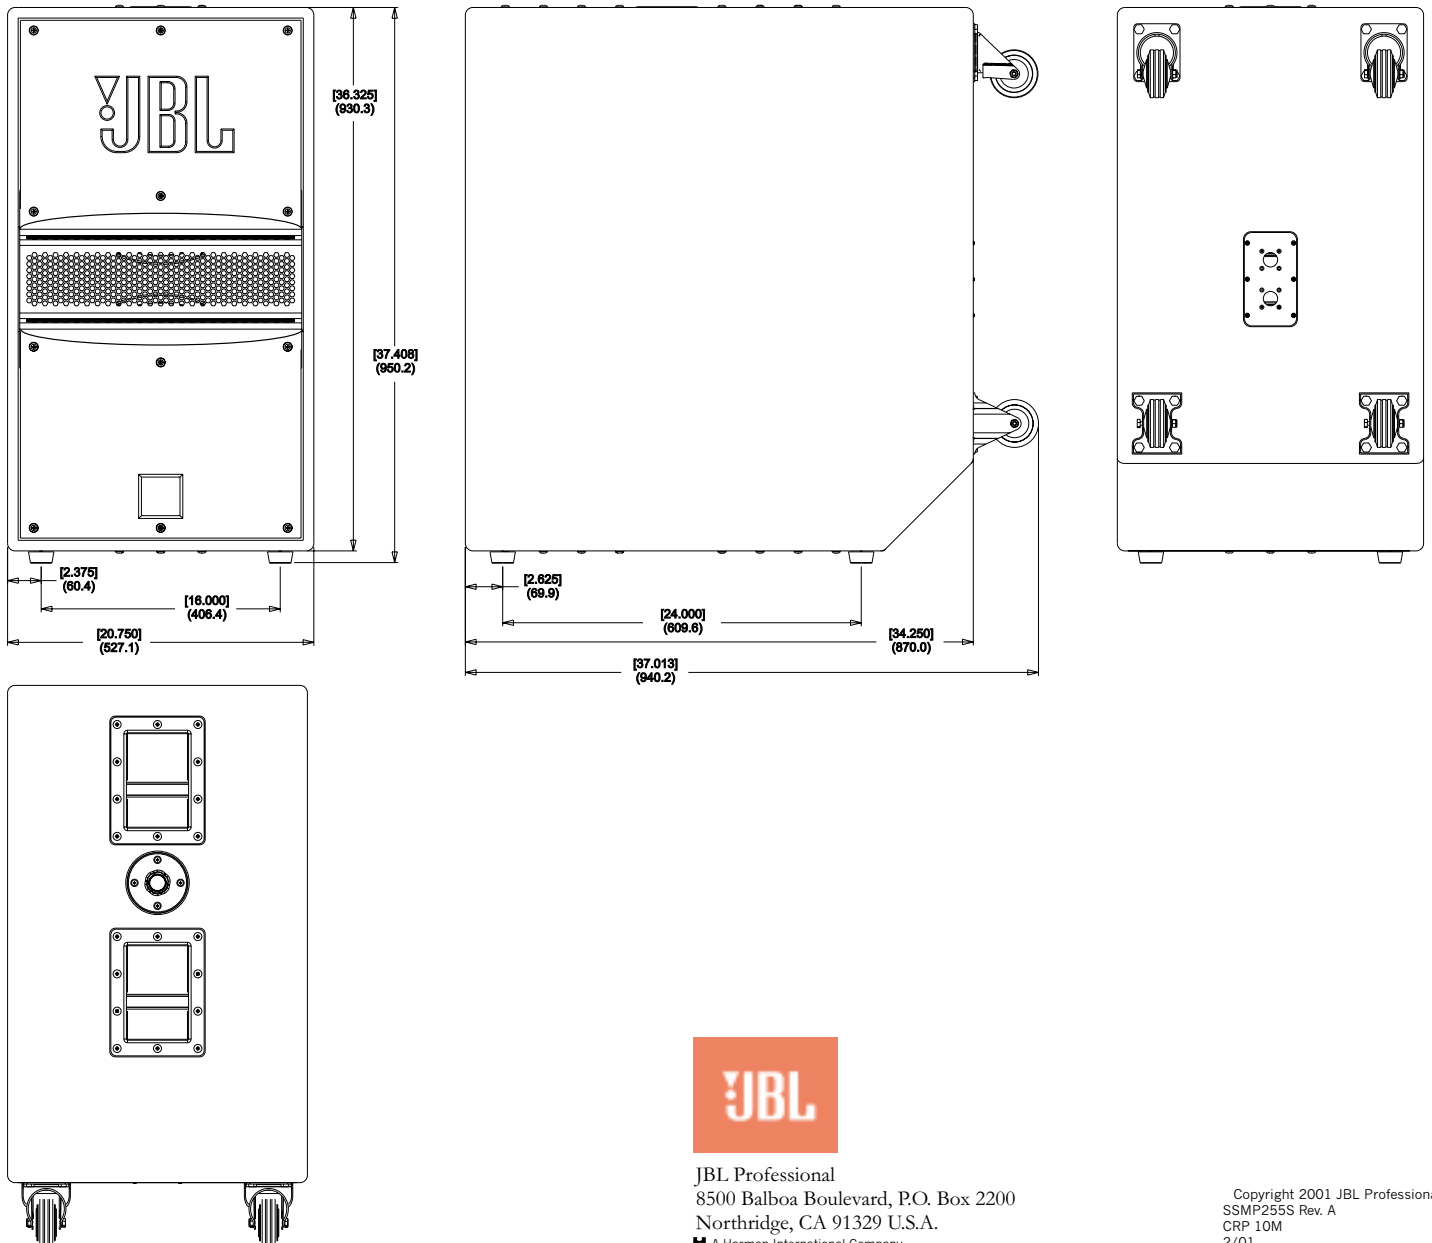

JBL Professional
 8500 Balboa Boulevard, P.O. Box 2200
 Northridge, CA 91329 U.S.A.
 A Harman International Company

Copyright 2001 JBL Professional
 SSMP255S Rev. A
 CRP 10M
 2/01