





Line 6				
<b>Mic Specs</b>	<b>HS70</b>	<b>HS30</b>	<b>LM4 (both)</b>	<b>HH element</b>
<b>element</b>	back electret cond	back electret cond	back electret cond	dynamic
<b>polar</b>	omni	cardioid	uni-directional	cardioid
<b>freq response</b>	20Hz-20kHz	50Hz-15kHz	50Hz-16kHz	*model dependant
<b>sensitivity (dB)</b>	-46	-45	-46	-57
<b>output Z</b>	2k ohm (+/-30%)	1.8k ohm	680 ohm	250 ohms
<b>power supply</b>	1.5-12 VDC	1.5-12 VDC	1.5-10VDC	n/a
<b>cable length</b>	50" (1.2m)1.2M	50" (1.2m)	39" (1m)	n/a
<b>temp range</b>	.	.	.	60 to -25 C temp


### HS70

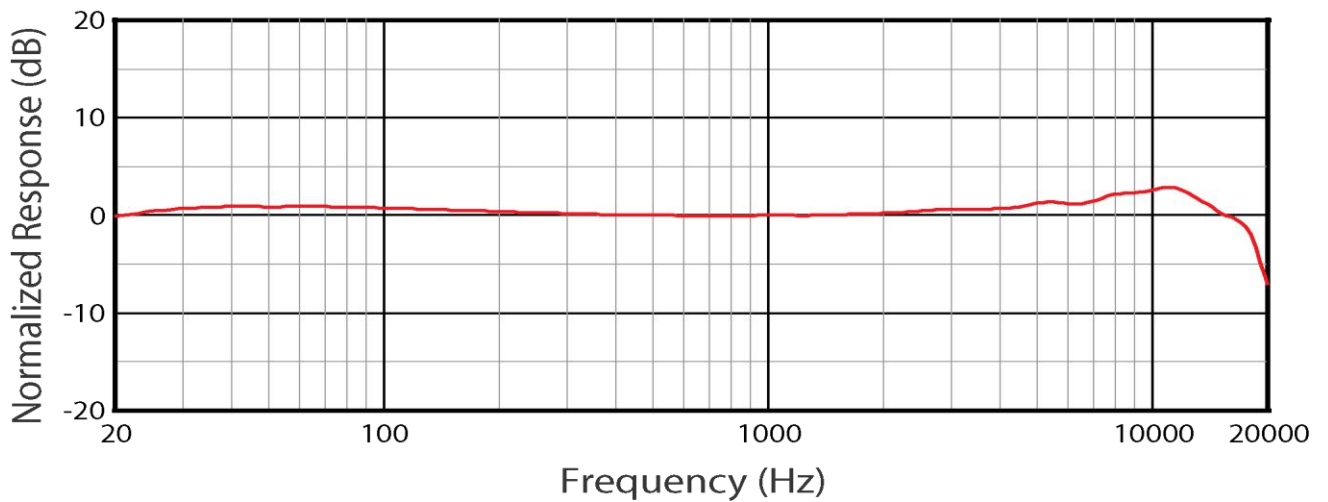

### HS30

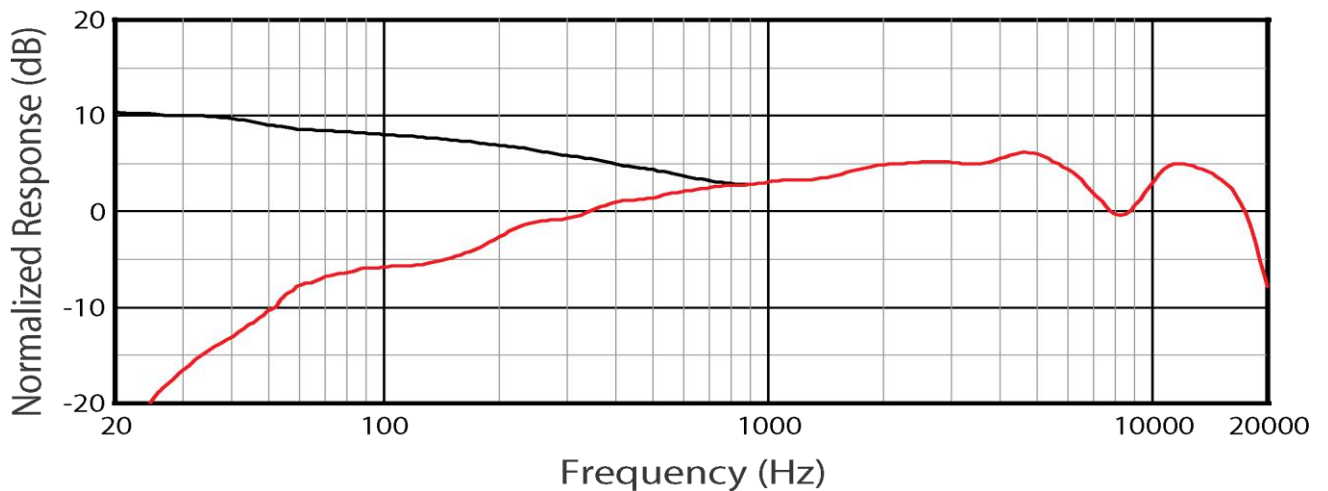

LM4-\*

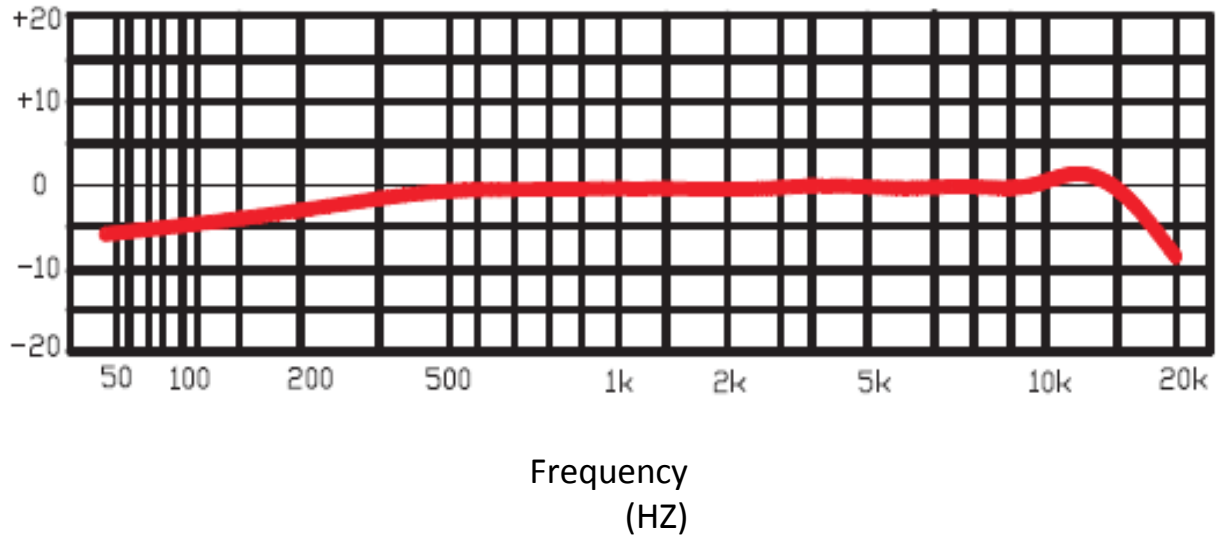

for Handheld Transmitters please see "Line 6 Guide to Mic Models"