




4726 Compact Bi-Radial Speakers System:

Only fractionally larger than the 4716, the 4726 has a broader frequency response specification (70 Hz to 17.5 kHz) and a 300 mm (12 in) low frequency driver, and can easily fill larger clubs and auditoriums. It shares the 4716's tapered cabinet design, is fitted with a 100° x 100° horn and titanium diaphragm high frequency compression driver, and will produce 117 dB at 1 m. Actively driven, with a passive network option, the 4726 uses the same multi-way EP-8 connectors common to most modules in the Sound Power Series. Mounting options are the same as for the 4716. For greater ultra-low frequency output, the Sound Power 4745 or 4785 sub-bass units are recommended. Cabinet dimensions are 646 mm H x 362 mm W x 356 D (25 3/8 x 14 1/4 x 14 in).

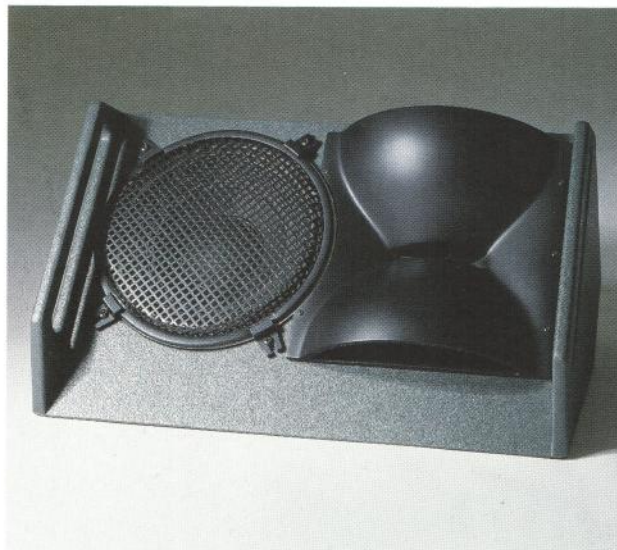

4728 Bi-Radial Stage Monitor Speaker System:

Utilizing the same 300 mm (12 in) bass driver and horn/compression driver combination as the 4726 and sharing the same specifications, the 4728 is designed specifically for stage foldback purposes. A uniquely shaped cabinet (646 mm H x 438 mm W x 302 mm D) (25 7/16 x 17 1/4 x 11 13/16 in) makes possible three different floor mounting angles 22.5, 45 and vertical. With the same wide band, dynamic performance of the 4726, the 4728 delivers a well controlled output pattern for maximum level with reduced risk of feedback. A stand mount adapter on the bottom plate makes the 4728 suitable for use as a side fill monitor, and the 4726's wall mount adapter may also be fitted.