



## PORTA-VOX

OUTDOOR P.A. SYSTEM

**It takes a strong system to produce a strong sound.**



▼ Powerful enough to handle crowds of 5,000 people, Porta-Vox fills an area the size of a football field with strong, clear sound.

▼ Rugged and weatherproof, it keeps on performing through all kinds of punishment.

▼ Weighs less than 35 pounds, so it's easy to carry, simple to set up and operate.

▼ Add a wireless microphone system, and move freely within a 1,000-foot radius.




# PORTA-VOX

OUTDOOR P.A. SYSTEM

## Features

- ▼ loud, reentrant horn-type speakers
- ▼ runs for up to 12 hours on its built-in rechargeable battery
- ▼ 40-watts of power; enough to drive additional speakers for greater coverage
- ▼ roto-molded polyethylene case that's extremely tough and durable
- ▼ mixable mic and auxiliary line inputs
- ▼ molded-in speaker stand receptacles
- ▼ includes microphone, built-in battery with charger, two speakers and cables

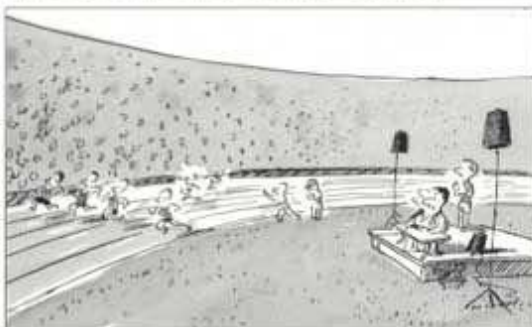

Take Porta-Vox wherever you need clear, powerful sound reinforcement.

## Models

- PB-500 Battery-powered portable outdoor P.A. system.
- PB-500W Battery-powered portable outdoor P.A. system with wireless mic receiver.  
\*mic/transmitter not included, see below.

## Accessories

- SP-500 Companion speakers (two).
- SS-250 Collapsible speaker stand.
- AWH \*Handheld wireless microphone.
- AWL \*Lapel wireless microphone, (body-pack transmitter).
- MIC-90P Handheld microphone; balanced, Lo-Z.
- VL-500 Vinyl slipcover.
- EX-25PA 25' mic extension cable.
- SC-50EX 50' speaker extension cable.

## SPECIFICATIONS

### PB-500, PB-500W

Rated power output:	2 x 20 watts @ 3Ω
Max SPL @ rated power:	120 dB @ 1 meter
Frequency response:	250 Hz-10 kHz ± 4 dB
Speakers:	2 reentrant horn-type, 6Ω
Inputs microphone:	Lo-Z, unbalanced, ¼" phone (input #2 used for wireless on PB-500W)
auxiliary:	Hi-Z, unbalanced, ¼" phone
Battery:	12 volt rechargeable, 7.0 AH, lead acid
Charger:	RC-16: 108-125 VAC, 60 Hz RC-16/220: 205-250 VAC, 50/60 Hz
Dimensions:	27 x 9.5 x 14", 69 x 24 x 35 cm
Weight:	34 pounds, 15 Kg.



Anchor Audio, Inc. ~ 913 West 223rd Street ~ Torrance, California 90502 ~ (310) 533-5984

© Copyright 1992 Anchor Audio, Inc. - publication number 102-7-A

# PORTA-VOX


OUTDOOR PUBLIC ADDRESS SYSTEM

Powerful enough to handle crowds of 5,000 people.

Loud, reentrant horn-type speakers.

Roto-molded polyethylene case is extremely tough and durable.

Weights just 30 pounds.

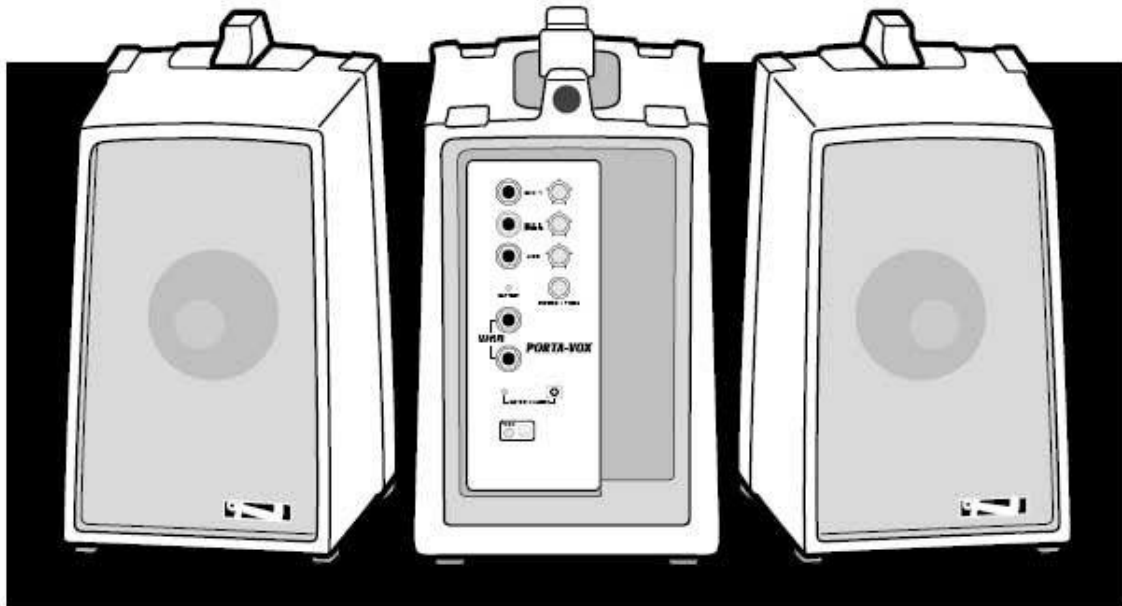

Comes with a 6-year warranty.

Runs for up to 12 hours on its built-in rechargeable battery.

40 watts of power; enough to drive an additional pair of unpowered speakers for even greater coverage.

## WIRELESS

**PB-500W**  
*Porta-Vox with built-in wireless receiver. (order mic separately).*

**WH-58**  
*Handheld wireless microphone/transmitter.*

**CM-60/WB-II**  
*CollarMic microphone with wireless body-pack transmitter.*

**HBM-60/WB-II**  
*Headband microphone with wireless body-pack transmitter.*

## ACCESSORIES

**SS-250**  
*Speaker stand.*

**SP-500**  
*Unpowered companion speaker pack (2 speakers with cables).*

**VL-500**  
*Storage cover.*

**CC-450**  
*Speaker stand bag.*

**SC-50EX**  
*50' speaker cable extension.*

**MIC-90P**  
*Handheld microphone; balanced, low impedance.*

## SPECIFICATIONS

<b>PB-500, PB-500W</b>	
Rated power output:	2 x 20 watts @ 3Ω
Max SPL @ rated power:	123 dB @ 1 meter
Frequency response:	250 Hz - 10 kHz ± 4 dB
Mic input 1:	Lo-Z, unbalanced, 1/4"-phone
Mic input 2:	Lo-Z, unbalanced, 1/4"-phone (used for wireless on PB-500W)
Line input:	Hi-Z, unbalanced, 1/4"-phone
Battery type:	12 volt rechargeable, 7.0 AH
Operation time:	10-12 hours (dependent upon use)
Charger (Anchor RC-16):	16 volts AC, 1.5A, 60Hz
Dimensions:	27 x 9.5 x 14", 69 x 24 x 35 cm
Weight:	30 pounds, 13.5 Kg.
	Specifications subject to change without notice.

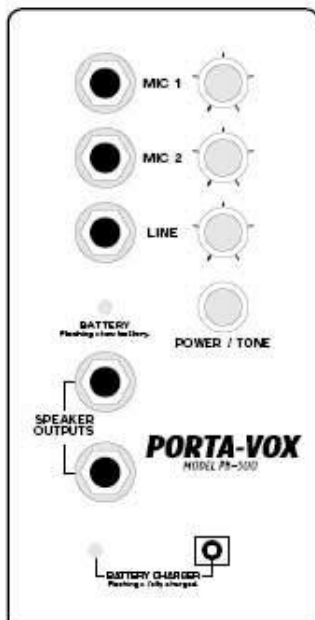


Diagram of Porta-Vox control panel.

## MODELS

**PB-500**  
*Battery-powered 40-watt system; includes mic and charger.*