



5.2 Features of the VS-1604 Matrix Switcher

Front/Rear panel features of the **VS-1604** are shown in Figure 1; the features are described in Table 1.

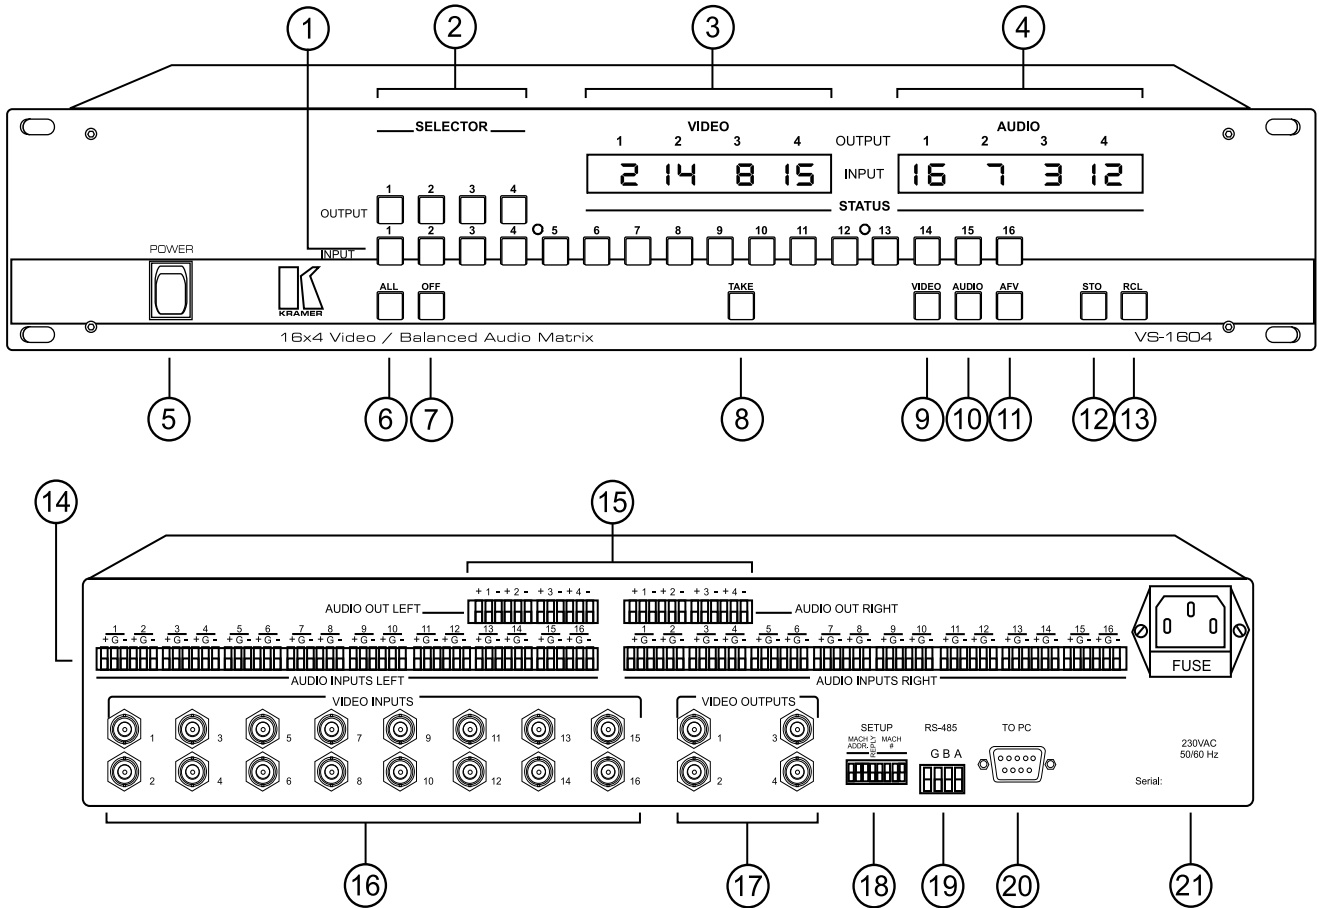


Figure 1: VS-1604 Front/Rear Panel Features

Table 1: VS-1604 Front Panel Features

No.	Feature	Function
1.	INPUT SELECTOR buttons	Select the desired input to be switched to the output.
2.	OUTPUT SELECTOR buttons	Select the desired output that the input signal is switched to.
3.	VIDEO OUTPUT STATUS	Displays the selected video input switched to the output above
4.	AUDIO OUTPUT STATUS	Displays the selected audio input switched to the output above
5.	POWER Switch	Illuminated switch: supplies power to the unit.
6.	ALL	When pressed followed by an input button, connects that audio/video input to all audio/video outputs.
7.	OFF	When pressed after pushing an output button, disconnects that video/audio output from the video/audio input. To disconnect all the outputs, press the ALL button followed by the OFF button.
8.	TAKE	The machines can operate either in " Take " mode or in