

900 Series Optional Lenses

For 9000 Professional Series Projectors

HITACHI
Inspire the Next



Multiple lens options for greater installation flexibility.



Lens	USL901	SL902	SD903W	SD903X	ML904	LL905	UL906
Zoom Ratio	x 1.3	x 1.5	x 1.5	x 1.5	x 1.5	x 1.6	x 1.6
F Number	1.8 (Wide) - 2.3 (Tele)	1.8 (Wide) - 2.3 (Tele)	1.6 (Wide) - 2.0 (Tele)	1.6 (Wide) - 2.0 (Tele)	1.8 (Wide) - 2.3 (Tele)	1.8 (Wide) - 2.2 (Tele)	1.8 (Wide) - 2.3 (Tele)
Focal Length	11 mm (Wide) - 14 mm (Tele)	17 mm (Wide) - 25 mm (Tele)	24 mm (Wide) - 36 mm (Tele)	24 mm (Wide) - 36 mm (Tele)	35 mm (Wide) - 54 mm (Tele)	51 mm (Wide) - 83 mm (Tele)	82 mm (Wide) - 130 mm (Tele)
Dimensions (W x H x L)	7.8 x 5.9 x 6.0 in.	7.9 x 5.9 x 6.0 in.	7.2 x 5.0 x 6.0 in	7.2 x 5.0 x 6.0 in	8.6 x 5.0 x 6.0 in	9.1 x 5.0 x 6.0 in	8.4 x 5.0 x 6.0 in
Weight	4.0 lbs.	4.4 lbs.	2.9 lbs.	2.9 lbs.	4.0 lbs.	4.2 lbs.	4.0 lbs.
Image Size	50" - 600"	50" - 600"	50" - 600"	50" - 600"	50" - 600"	50" - 600"	50" - 600"

Seven lenses are available to match various screen sizes and installation environments. Projection is possible in diverse installation areas from small conference rooms to auditoriums, convention halls, and other large spaces.

		Projection Distance (Projector front panel to screen for a 100 inch image)	Throw Ratio	Projection distances for optional lenses when projecting onto a 100" screen
USL901 Ultra short throw lens Zoom: x 1.3	CP-WU9410 CP-WX9210 CP-X9110	67"-84" (1.7-2.1m) 71"-88" (1.8-2.2m) 66"-82" (1.7-2.1m)	0.8 - 1.0 0.8 - 1.0 0.8 - 1.0	
SL902 Short throw lens Zoom: x 1.5	CP-WU9410 CP-WX9210 CP-X9110	100"-149" (2.5-3.8m) 105"-156" (2.7-4.0m) 98"-146" (2.5-3.7m)	1.1 - 1.7 1.2 - 1.8 1.2 - 1.8	
SD903W Standard lens Zoom: x 1.5	CP-WU9410 CP-WX9210	140"-209" (3.5-5.3m) 147"-220" (3.7-5.6m)	1.6 - 2.4 1.7 - 2.6	
SD903X Standard lens Zoom: x 1.5	CP-X9110	136"-205" (3.5-5.2m)	1.7 - 2.5	
ML904 Middle lens Zoom: x 1.5	CP-WU9410 CP-WX9210 CP-X9110	205"-313" (5.2-7.9m) 216"-329" (5.5-8.3m) 200"-306" (5.1-7.8m)	2.4 - 3.6 2.5 - 3.8 2.5 - 3.8	
LL905 Long throw lens Zoom: x 1.6	CP-WU9410 CP-WX9210 CP-X9110	298"-482" (7.6-12.2m) 314"-506" (8.0-12.9m) 291"-471" (7.4-12.0m)	3.5 - 5.6 3.7 - 5.9 3.6 - 5.8	
UL906 Ultra long throw lens Zoom: x 1.6	CP-WU9410 CP-WX9210 CP-X9110	472"-749" (12.0-19.0m) 496"-786" (12.6-20.0m) 462"-732" (11.7-18.6m)	5.5 - 8.8 5.8 - 9.2 5.7 - 9.1	

1.800.HITACHI

dmd.info@hal.hitachi.com

hitachi-america.us/projectors




900 Series Optional Lenses

For 9000 Professional Series Projectors

HITACHI
Inspire the Next

Lens Shift

Vertical or horizontal distance from the center of the projected image to the point where the lens axis intersects the screen. Illustrations below show the range of LENS SHIFT when the projector is installed upside down such as ceiling mount.

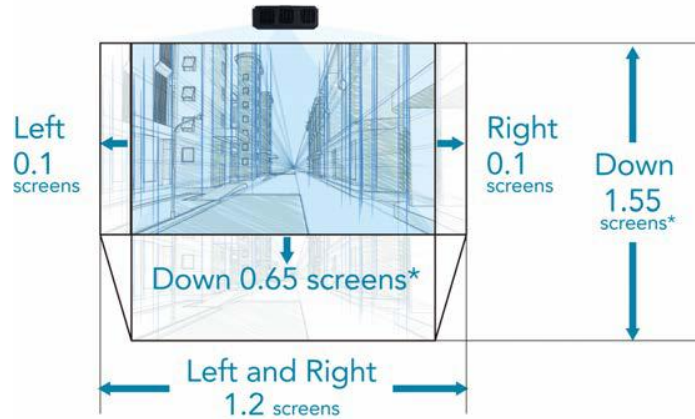

900 Series Lens Shift

		USL901	USL902	SD903X/SD903W	ML904	LL905	UL906
CP-X9110	Left/Right	0-10%	0-10%	0-10%	0-10%	0-10%	0-10%
	Down	0-50%	0-55%	0-55%	0-55%	0-55%	0-55%
CP-WX9210	Left/Right	0-10%	0-10%	0-10%	0-10%	0-10%	0-10%
	Down	0-55%	0-65%	0-65%	0-65%	0-65%	0-65%
CP-WU9410	Left/Right	0-10%	0-10%	0-10%	0-10%	0-10%	0-10%
	Down	0-50%	0-60%	0-60%	0-60%	0-60%	0-60%

900 Series Lenses

HI0229-Rev.1-07/14
All specifications subject to change without notice.
©2014 Hitachi America, Ltd. All Rights Reserved.

Hitachi America, Ltd.

Toll Free: 1.800.HITACHI • Email: dmd.info@hal.hitachi.com
Web: hitachi-america.us/projectors

